








NO.	NOTES
1	ALL RESISTORS 1/2 WATT, RESISTANCE VALUES IN OHMS, CAPACITANCE VALUES IN MICROFARADS UNLESS OTHERWISE SPECIFIED
2	TERMINAL DESIGNATIONS ENCLOSED IN PARENTHESES ARE FOR REFERENCE AND ARE NOT MARKED ON COMPONENT.
3	SL-BL INDICATES SLOW BLOWING
4	 INDICATES FEMALE TERMINAL  INDICATES MALE TERMINAL
5	REFERENCE SPEC FOR TELETYPE CORPORATION EMPLOYEES ONLY: 61.267S
6	T1 SECONDARY 50V AC TO CENTER TAP WITH 115V AC INPUT; 8 OHMS (MAX) PRIMARY RESISTANCE; 10 OHMS (MAX) SECONDARY RESISTANCE TO CENTER TAP
7	 INDICATES CIRCUIT COMMON.
8	
9	REFER TO 8322WD FOR ACTUAL WIRING DIAGRAM
10	REFER TO RELATED SET DIAGRAMS FOR EXTERNAL CIRCUITS
11	 INDICATES SINGLE SHIELDING  INDICATES DOUBLE SHIELDING
12	TERMINAL TC-5 IS AN AUXILIARY KEYS OUTPUT TERMINAL TC-6 AN AUXILIARY SELECTOR MAGNET DRIVER INPUT AS SHIPPED. THESE TERMINALS ARE STRAPPED SO THE PAGE PRINTER WILL MONITOR ALL TRANSMISSIONS FROM THE KEYS
13	TERMINAL TD-5 AND TD-6 PROVIDE AUXILIARY INPUTS TO EACH OF THE TWO KEYS CARDS AS SHIPPED. THESE TERMINALS ARE STRAPPED SO THAT BOTH THE LXD AND LAK CAN USE A SINGLE KEYS CARD FOR NON-SIMULTANEOUS OPERATION WITH THIS ARRANGEMENT DO NOT PUT A 303142 KEYS CARD IN KB CONNECTOR.
14	KEYER OUTPUTS + 6V MARK - 6V SPACE
15	 INDICATES INNER SHIELD  INDICATES OUTER SHIELD
16	IF EXTERNAL BATTERY IS SUPPLIED FOR POLAR LINE KEYS, REMOVE STRAPS BETWEEN TD-1, TD-2 AND TD-3, TD-4. APPLY + BATTERY (6.6 TO 7.8V) TO TD-2, AND - BATTERY (6.6 TO 7.8V) TO TD-4. IF ± 6V IS SUPPLIED, THE KEYS OUTPUT WILL DROP TO ± 4.5V.

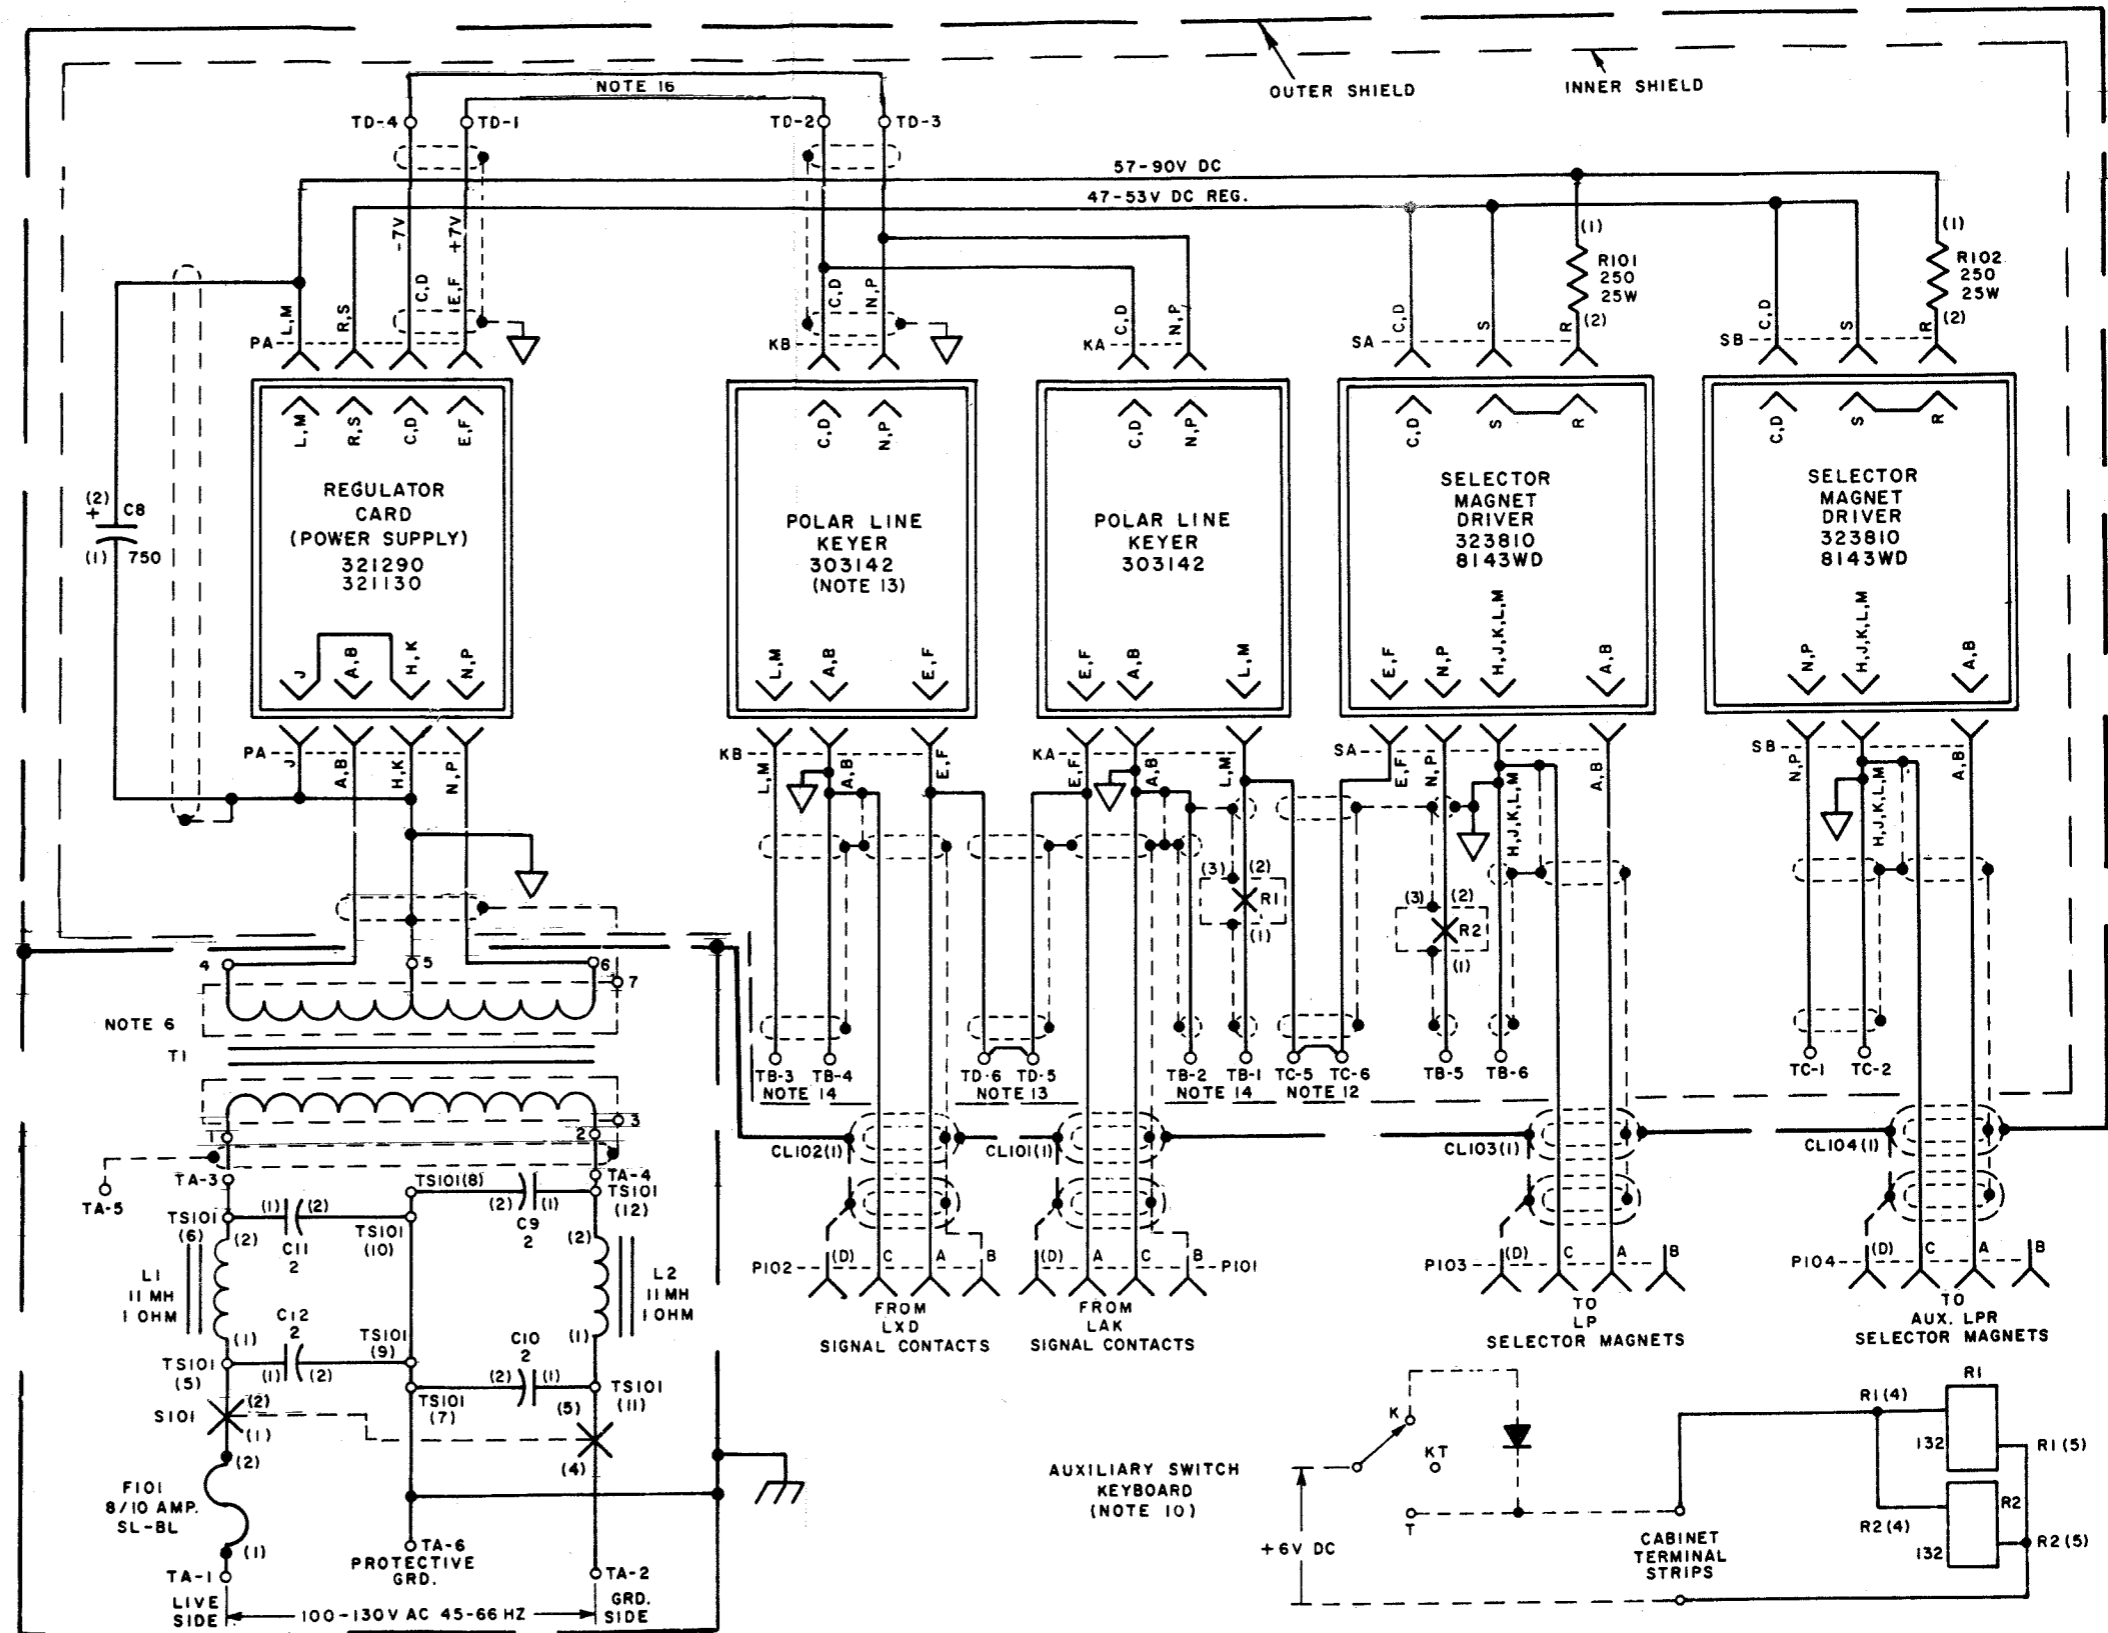


Figure 5-41. 323811 Electrical Service Assembly (Signal) Schematic Wiring Diagram