


*Class 19—Batteries*

**CLASS 19**

**BATTERIES (ALL TYPES)**

**INCLUDES: BATTERY BOXES  
BATTERY RACKS  
BATTERY ASSEMBLIES**

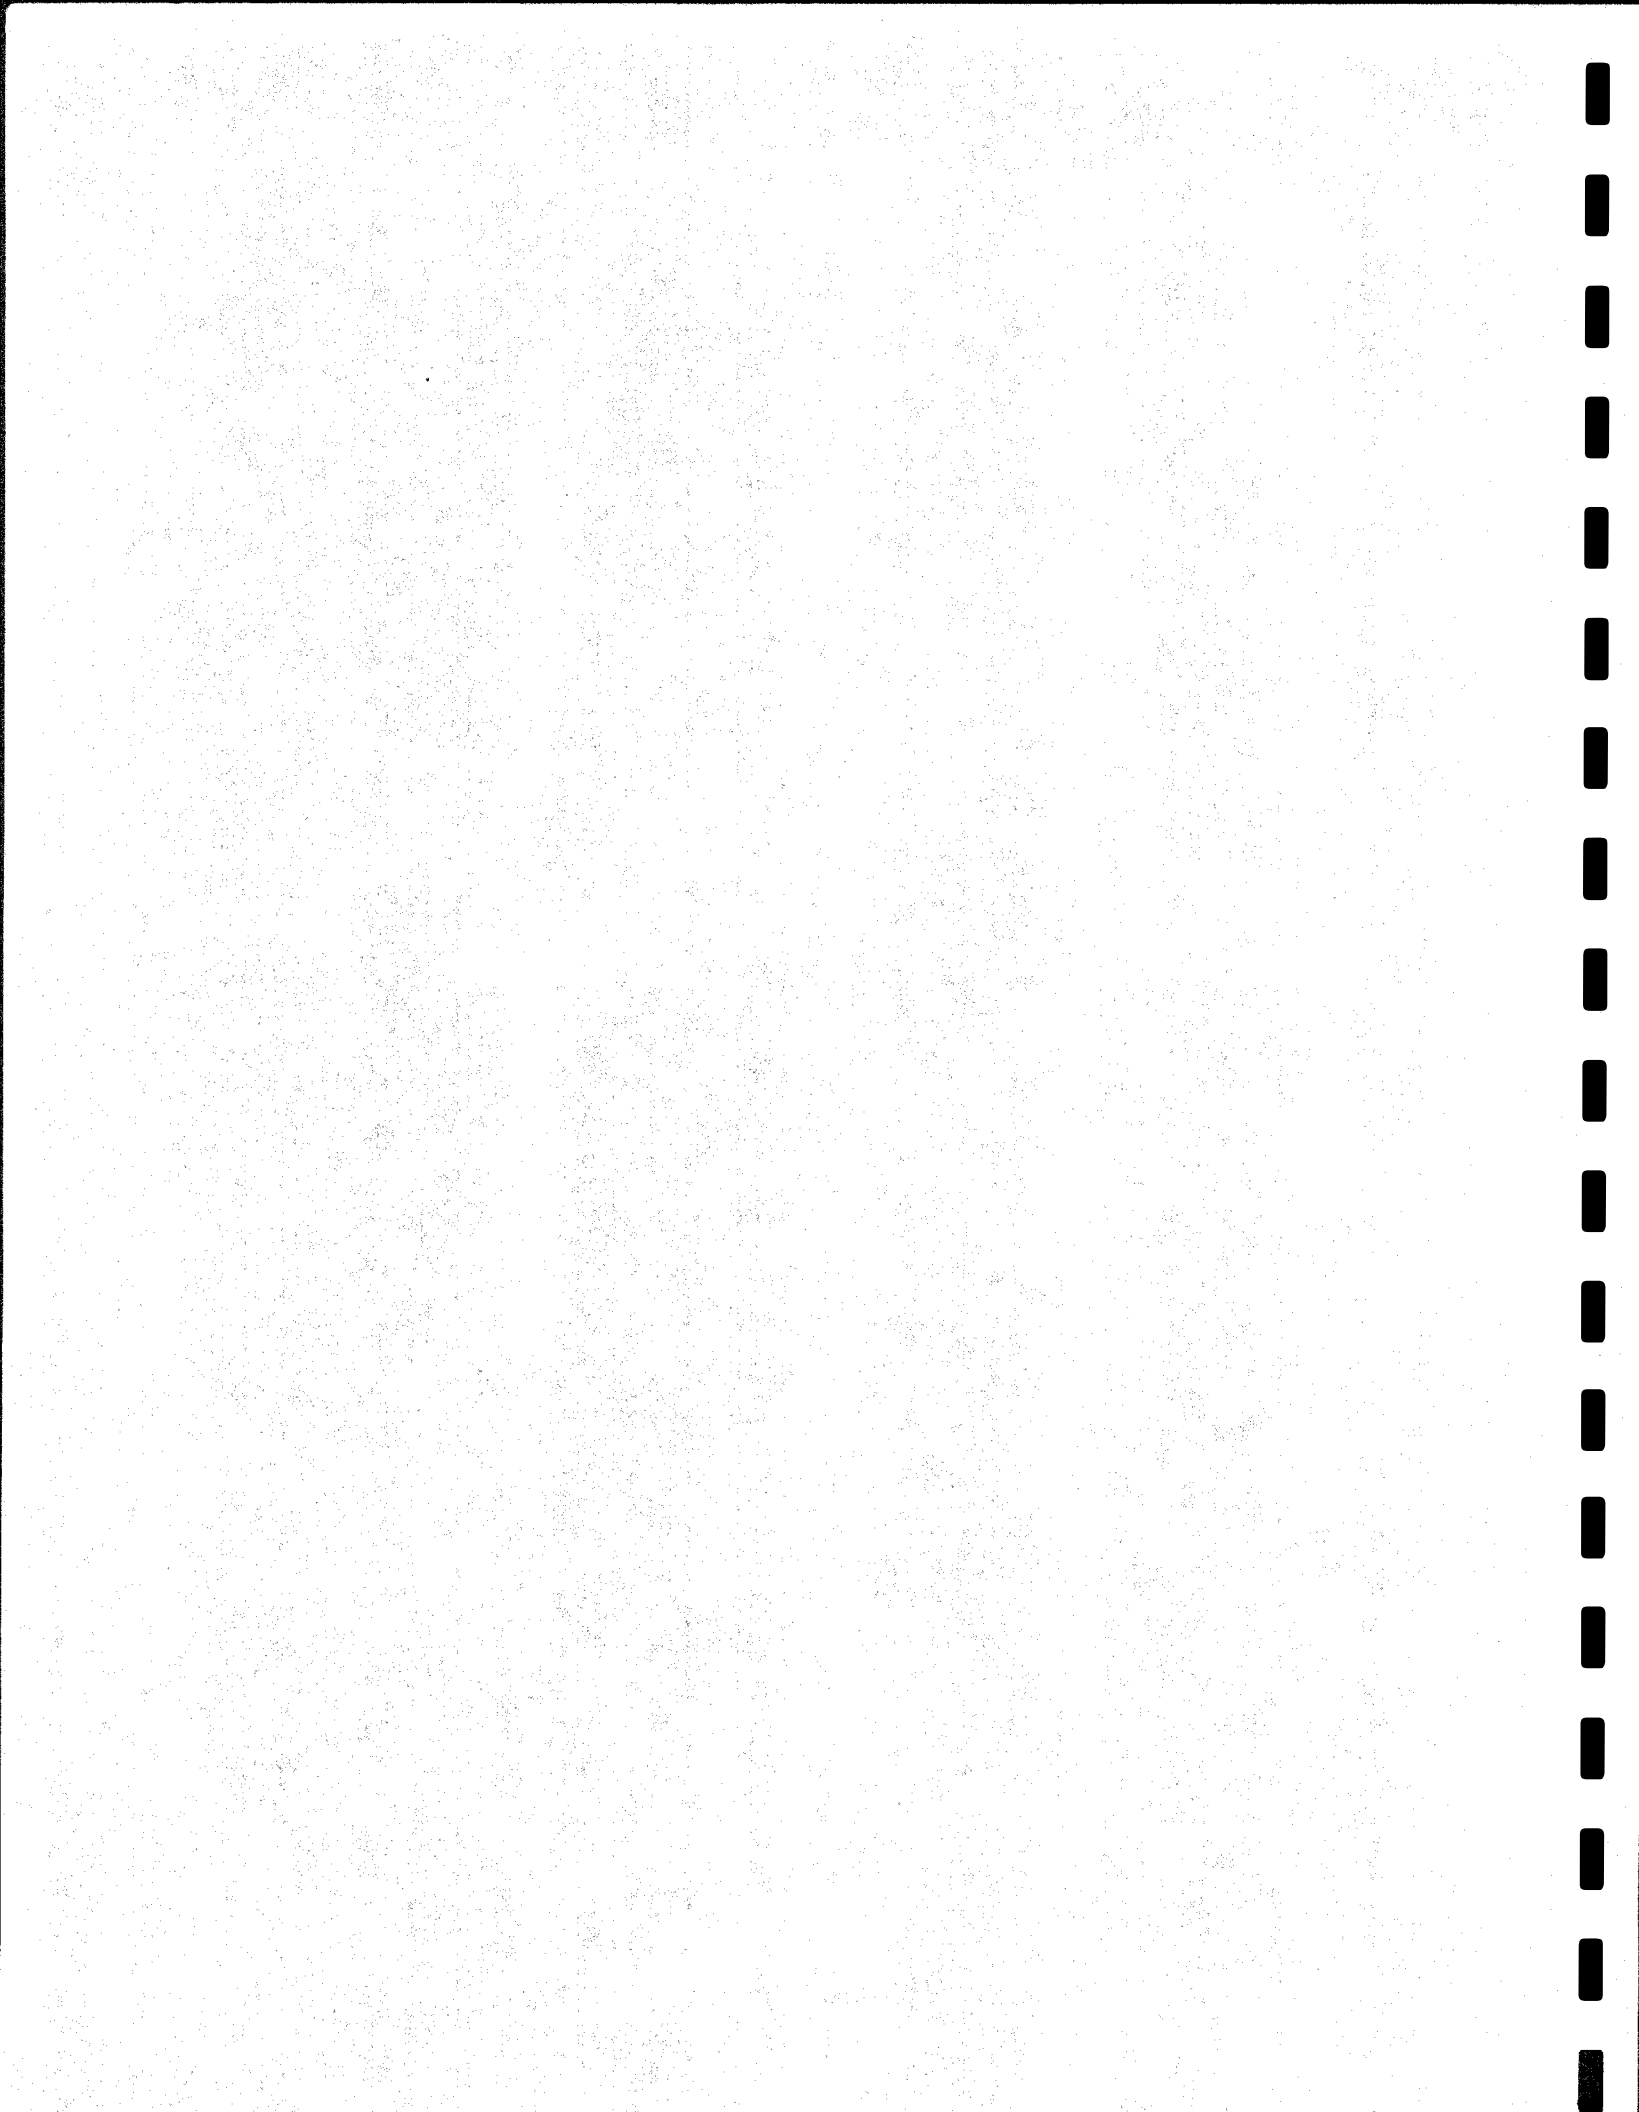

Class 19—Batteries

3.19-1

NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION
RM-19000	JC & JG	RM 50F 443	CAY 19007	TAV-2	CAY-T-113	19015	GENERAL USE	RE 13A 602
BOX - BATTERY			BOX - BATTERY.			BATTERY DRY (PACK)		
FOR SOUND AMPLIFIER BATTERIES.			WT. WITH BATTERIES 50 LBS.			3 VOLT "A" BATTERY, 144 VOLT "B" BATTERY, 13-1/2 VOLT "C" BATTERY & 4-1/2 VOLT MICROPHONE BATTERY CONNECTED TO A -39302 SOCKET IN CENTER OF TOP, 8" LONG 5" WIDE 6-11/16" HIGH - OVERALL HEIGHT 7".		
6/9/32			7/24/33			9/22/38	CBR/3F28108	
NOV. 41			NOV. 41			NOV. 41	CGD/6CF2-108	
CKD 19001	DM		CWB 19008	JL-2				19015
BOX - BATTERY			BATTERY - STORAGE.			CASE DIMENSIONS 8" X 5" X 6-13/16"		OVERALL HEIGHT 7-7/32" OVER SOCKET COVER.
7/6/32			1/11/34					
NOV. 41			NOV. 41					
19002	GENERAL USE	17-B-9	CPR 19009	NOS - 49329		CBR 19016	XAK SERIES	W-B-101
BATTERY - STORAGE			HYDROMETER			BATTERY - DRY		
48 VOLTS, 6.000 M.A.-H. - LEAD-ACID.			APPROXIMATELY 11-1/2" OVERALL LENGTH.			4-1/2 VOLTS, CASE DIMENSIONS 5-5/16 HIGH X 3-3/16 X 3-59/64; OVERALL HEIGHT: 6-15/16. SPRING TERMINALS.		
(4390)			DIAMETER OF NOZZLE 1/4".					
10/17/32			6/8/36	PHILCO 230A		7/20/39	4F3H	
NOV. 41			NOV. 41			NOV. 41		
19003	GENERAL USE	17-B-7	19010	TBO	RE19AA105	CRF-		
BATTERY - DRY			BATTERY - DRY (A)			CES-19017	RBM-1, -2	
AIRCRAFT - 22-1/2 VOLTS TAPPED AT 12 VOLTS. PIGTAIL CONNECTIONS - WEIGHT 1 LB. 6 OZ. CASE DIMENSIONS 4-1/4 X 2-5/8 X 2-3/4 OVERALL HEIGHT 3" OVER LEADS.			1-1/2 VOLTS. (SCREW TERMINALS) CASE DIMENSIONS: 3-15/16" HIGH X 2-5/8" SQUARE WITH CORNERS ROUNDED BY 5/8" RADIUS; OVERALL HEIGHT: 4-5/16".			PORTABLE STORAGE BATTERY:		
(2469)			12/29/36	CBR/4FA	CG DMC.	12 VOLTS, 34 AMPHOURS AT 5 HOUR RATE. SPECIFIC GRAVITY, FULL CHARGE 1.275-1.300. CHARGING RATE: START 6 AMPS -- FINISH 4 AMPS. LOW VOLTAGE LIMIT 1.75		
4/6/33			NOV. 41		K-7869969	CRF: D-51		
NOV. 41						4/14/42	6TS-91	CAY: P-7708590
19004	GENERAL USE	W-B-101	19011	TBO	W-B-101	FEB. 45	CRF: 3S-5	SUB 1 *
BATTERY - DRY			BATTERY - DRY (C)					
45 VOLTS - 35 M.A. - HEAVY DUTY. CASE DIMENSIONS 4-1/4" X 4-1/2" X 7-3/8". OVERALL HEIGHT = 7-15/16". 3 SCREW TERMINALS.			7.5 VOLT TAPPED AT 1-1/2, 3, 4-1/2, 6 VOLTS WITH TERMINALS ON EACH CELL. 3-1/2" NEG. LEAD TO BE BLACK FLEXIBLE WIRE; CASE DIMENSIONS 4" X 7/8" X 2-3/4"; OVERALL HEIGHT 3-1/4".					
7/7/33	21308		12/29/36	CBR:5540				
NOV. 41			NOV. 41					
19004-A	GENERAL USE	W-B-101	CKD 19012	OR		19018	TBP	RE 13A 603
SAME AS 19004 EXCEPT USING SPRING CLIPS INSTEAD OF KNURLED NUTS.			BATTERY BOX & CHARGING UNIT. FOR 110 VOLT A.C. OPERATION-CHARGING RATES OF .2, .5, 1, 2 & 5 AMPS. THIS NUMBER DOES NOT INCLUDE THE BATTERIES, BUT PROVIDES SPACE FOR ONE EXIDE TYPE 3-KZH-7 STORAGE BATTERY & 3 BURGESS TYPE Z2308 B BATTERIES OR EQUAL			BATTERY PACK: 6-9/16" WIDE X 9-3/8" DEEP X 4-1/4" HIGH. RECEPTACLE ON TOP CENTERED 3-1/2" TO THE LEFT AND 1-5/32" BACK AS VIEWED FROM TOP. NEW BATTERY RATED AS FOLLOWS: COMMON TO TERMINAL A1 + 3 VOLTS, A2 + 1.5 VOLTS, B + 156 VOLTS, C - 7.5 VOLTS.		
10/27/36	21308		3/11/37			11/9/39	CGD	CAY: P-7707120
NOV. 41			NOV. 41			NOV. 41		SUB 0
19005	GENERAL USE	W-B-101	19013	GENERAL USE	W-B-101	19018-A	GENERAL USE	RE13A603
BATTERY - DRY			BATTERY DRY			BATTERY PACK		
45 VOLTS TAPPED AT 22-1/2 V. - 7 M.A. LIGHT DUTY. CASE DIMENSIONS 4-3/8" X 2-11/16" X 6". OVERALL HEIGHT 6-5/8". 3 SCREW TERMINALS.			4-1/2 V (NEG) 2-1/2" LONG; 7/8" DEEP; 2-9/16" HIGH; OVERALL HEIGHT 3" (2 SCREW TYPE TERMINALS.) "C" BATTERY.			6-9/16" WIDE X 9-3/8" DEEP X 4-1/4" HIGH NEW BATTERY RATED AS FOLLOWS: COMMON TO TERMINAL A1 + 3 VOLTS; A2 + 1.5 VOLTS; B + 156 VOLTS; C - 7.5 VOLTS. SAME AS BASIC NUMBER EXCEPT RECEPTACLE CAN SLIDE ± 1/16" FROM NOMINAL LOCATION.		
7/7/33	6508		9/22/58	CBR/5560		5/15/41		
NOV. 41			JULY 43			MAR. 42		
19006	GENERAL USE	W-B-101	19014	GENERAL USE	W-B-101	3-1/2" TO THE LEFT AND 1-5/32" BACK AS VIEWED FROM TOP.		19018-A
BATTERY - DRY			BATTERY DRY					
22.5 VOLTS - 7 M.A. - LIGHT DUTY. CASE DIMENSION 4-1/4" X 2-5/8" X 2-3/4" HIGH, OVERALL HEIGHT 3-1/4". 2 SPRING CLIPS.			4-1/2 VOLTS. 4-1/16" LONG X 1-1/2" DEEP X 3-3/16" HIGH; OVERALL HEIGHT 3-15/16". (TAPPED AT 1-1/2 & 3 VOLTS) 4 SCREW TERMINALS.					
7/7/33	5156		9/22/38	CBR/2370				
NOV. 41			NOV. 41					

RESTRICTED

NAVSHIPS 900,109

Class 19—Batteries

NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION
19018B	RE 13A 603D	RE 13A 603	RN-19025	OR-2	RW 50A 262A	19032	RBR	
<p>BATTERY PACK: 6-9/16" (+0.0, -0.1/16)" WIDE, 9-3/8" (+0.0, -1/16)" DEEP, 4-3/8" (+0.0, -3/16)" HIGH. NEW BATTERY RATED AS FOLLOWS: COMMON TO TERMINALS A1, +3 VOLTS, A2, +1.5 VOLTS, B, +1.56 VOLTS, C, -7.5 VOLTS. SIMILAR TO -19018 AND -19018A EXCEPT FOR METHOD OF MOUNT-6/5/42 AUG. 44</p>			<p>BATTERY BOX TO HOUSE FOUR NAVY TYPE -19004 45-VOLT "B" BATTERIES.  8/11/41 NOV. 41</p>			<p>"B" BATTERY: 67-1/2 VOLTS.  5/16/42 JUNE 42 CNC:467</p>		
<p>ING SLIDING SOCKET, TYPE 19018B OF SOCKET USED, AND BATTERY TOP (WHICH INCLUDES SOCKET) HAS BEEN INCREASED IN THICKNESS FROM 30 GAUGE TO 24 GAUGE.</p>			<p>CGD 19026 JH-1 DRY BATTERY UNIT VOLTAGE 7.5 AND 300 VOLTS.  Ø CGD: 8121541; CKD: D5529-1 REV 2 4/1/42 640L110 Ø SEE ABOVE AUG. 42</p>			<p>CBR 19033 * SEE BELOW "B" BATTERY: DRY BATTERY, 22-1/2 VOLTS, TWO 6" FLEXIBLE LEADS WITH SOLDERED ENDS. DIMENSIONS 3-7/16" LONG, 2-5/32" WIDE, 2-19/32" GENERAL MARINE CORPS USE Ø CBR: 4156 SPECIAL. (SIGNAL CORPS TYPE BA-2) 6/10/42 Ø SEE ABOVE CBR: 1987 AUG. 42</p>		
<p>CES 19019 DT, DT-140Y STORAGE BATTERY 6 VOLTS, 133 AMPERE HOURS; 11-3/4" X 6-7/8" X 9-3/8" HIGH; WEIGHT - 50 LBS.  11/24/39 PC#16453- NOV. 41 3LXL-11-1</p>			<p>CBR 19027 MP RE 13A 665 BATTERY PACK: 1-1/2/67-1/2/135 WITH C SECTION, 6 VOLTS  *CBR: 4F-2823, 2824, 2825, 2826, 2827, 2829, 2829, 2450 4/14/42 8NXX90M4 *SEE ABOVE OCT. 42</p>			<p>32" HIGH MAX. DIMENSIONS CBR 19033 WITH -1/16" TOLERANCE. SIG. CORPS. DWG 11206A1-1</p>		
<p>CNC 19020 ZB DRY BATTERY 6 VOLTS  10/17/40 718 NOV. 41</p>			<p>19027-A MAB BATTERY PACK: 1 1/2/67 1/35 V WITH 6 V SECTION. SAME AS BASIC NUMBER EXCEPT IS OF BETTER DESIGN.  3/20/43 MAB CCI: 438NXX90M4 MAR. 44</p>			<p>19033-A GENERAL USE "B" BATTERY CONSISTS OF 2 BANKS OF EIGHT 163 MINI-MAX ASSEMBLIES 24 VOLTS. MECHANICALLY INTERCHANGEABLE WITH -19033, NATIONAL CARBON TYPE 763 EXCEPT TWO FLEXIBLE WIRE TERMINALS INSTEAD OF TWO SCREW TERMINALS.  12/28/43 CNC: 763 MODIFIED CNC: WHD8435-A FEB. 44</p>		
<p>CNC 19021 ZB DRY BATTERY 45 VOLTS  10/17/40 482 NOV. 41</p>			<p>19028 TDC BATTERY: 3/90 VOLTS; 4" X 1-3/4" X 4-1/2" HIGH, 3 PRONG SOCKET. -A AND -B COMMON  4/20/21 JUNE 42</p>			<p>19034 RE 13A 660 DRY BATTERY PACK: "A" SECTION 1-1/2 VOLTS, "B" SECTION 90 VOLTS. HAS A 3 PRONG FEMALE PLUG RECEPTACLE TO ADMIT AN EBY MODEL 66-3 B OR EQUIVALENT PLUG. WITH A LOAD OF 4 OHMS ON THE "A" SECTION AND 4500 OHMS ON THE "B" THE CLOSED CIRCUIT END VOLTAGES 6/22/42 CBR: 122W60 AUG. 42</p>		
<p>19022 * SEE BELOW EN28/1379 "A" BATTERY MSA41 3 VOLTS.  * SONO RADIO BUOYS. 4/22/41 CBR: 48C2 NOV. 41</p>			<p>CLC 19029 TBY SERIES STORAGE BATTERY: RATED 4 VOLTS, 40 AMPHOURS AT 16 HOUR RATE. NON-SPILLABLE POLYSTYRENE CASE. INCLUDES A METAL BATTERY CONTAINER FOR PROTECTING THE BATTERY.  4/24/42 S-1115 AA-1066 JUNE 42 SUB 0</p>			<p>WILL DROP TO 1 VOLT "A" 19034 AND 68 VOLTS "B" AFTER 130 MINUTES. MAX. DIMENSIONS 1-7/8" X 5-5/8" X 4-1/2" (INCHES). WEIGHT 2 POUNDS. PLUG RECEPTACLE ON 5-5/8" X 4-1/2" SIDE.</p>		
<p>19023 * SEE BELOW EN28/1379 "B" BATTERY MSA41 50 VOLTS.  * SONO RADIO BUOYS. 4/22/41 CBR: 10538 NOV. 41</p>			<p>CFE 19030 RBR BATTERY POWER UNIT: CONSISTS OF MOUNTING RACK AND COVER, TWO TYPE -19031 "A" BATTERIES, ONE TYPE -19032 "B" BATTERY, OUTLET FOR USE WITH CONNECTING CABLE. FOR USE WITH NAVY TYPE CFE-10138 CASE.  5/16/42 CFE: 102-8-108 OCT. 42 REV 0</p>			<p>CGK 19035 TDK STORAGE BATTERY: 6 V, 3 CELLS, 17 PLATES EACH; 256 AMPERE HOUR RATING CHARGING RATE APPROXIMATELY 10 AMPERES OR TRICKLE CHARGE 1/2 AMPERE. DIMENSIONS: 8" WIDE, 21-5/8" LONG AND 17 1/2" HIGH. WEIGHT: 170 POUNDS. LEAD ACID ELECTROLYTE. WOOD CASE COVERED WITH 6/24/42 CGK: TITAN (TYPE) CRM: TS-327 JULY 43 HT-17 CELLS SUB 0</p>		
<p>19024 * SEE BELOW EN28/1379 "C" BATTERY MSA41 3 VOLTS.  * SONO RADIO BUOYS. 4/21/41 CBR: 328P NOV. 41</p>			<p>19031 RBR "A" BATTERY: 1-1/2 VOLTS.  5/16/42 CNC: 950 CG: K-54J201 MAR. 44 REV 0</p>			<p>ACID-RESISTING PAINT. CGK 19035</p>		
<p>ASSIGNED ISSUED</p>			<p>ASSIGNED ISSUED</p>			<p>ASSIGNED ISSUED</p>		
DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER	DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER	DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER

Class 19—Batteries

3.19-3

NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION
CGY 19036	TOM		19043	GEN USE	17 B 7	CUO-19049	GENERAL USE*	
STORAGE BATTERY: RATED 6 VOLTS, 82 AMP HOURS. LEAD-ACID TYPE WITH 3 CELLS. (DIMENSIONS 9" LONG X 7" WIDE X 7-3/16" HIGH).			"A" BATTERY: 6-VOLTS, DRY HAS 16 SIZE "F" CELLS (OF SPEC W-9-101 ARRANGED IN 4 BANKS OF 4 IN SERIES, 6-3/8" X 8-1/4" X 2-3/4", HAS BINDING POSTS AND CARRYING HANDLE, BINDING POSTS ON THE 2-3/4" X 8-1/4" FACE. RATED 160 WATT-HOURS. 2/5/43 CBR:4F4H CBR:MF-1449 SEPT 43			BATTERY POWER UNIT: POWER UNIT FOR NAVY TYPE -46212, -46213, AND -46214 RF TO IF CONVERTERS. CONSISTS OF 7 BATTERIES; I.E. 1 NAVY TYPE -19020 AND 6 NAVY TYPE -19032, TWO OF WHICH ARE SPARES. SAME AS *NX88-31105 8/10/43 205 NOV. 43		
8/14/42 OCT. 42		ST-2031	CGU 19044	*SEE BELOW		CUO-19047	EXCEPT HAS 3 RECEPTACLES INSTEAD OF 1.	CUO-19049
CGD 19037 AMA "A" BATTERY: 1.5 VOLTS			BATTERY POWER UNIT: OUTPUT 67 1/2 AND 1 1/2 VOLTS DC. USES (3) #4156 BURGESS OR SIG CORPS BA-2 AND (1) #16 DRY CELL OR EQUIVALENT.					
10/26/42 TYPE L APR. 43 SIG.CORPS BA-37 CGG:48827576			*FOR USE WITH ATN-1 3/27/43 DR-NO-8 AUG. 44 DATED 3/5/43					
CBR 19038 AMA "B" BATTERY: PROVIDES 100 TO 110 VOLTS, 67 TO 73 CELLS.			CBR 19045 DAC BATTERY PACK: 1 1/2 AND 90 VOLTS, OVERALL DIMENSIONS 2 7/16" DEEP, 8 1/8" WIDE, 4 11/16" HIGH WEIGHT 4 POUNDS 12 OZ. SOCKET NUMBER #2671 (4 PRONG).			CW-19050 NAA-NX88-31643 BATTERY: PRIMARY TYPE; 4 CELLS AT 1.5 VOLTS PER CELL, APPROXIMATELY 7" X 2 11/16" X 8 1/4"; CASE MATERIAL IS BAKELITE. CAPACIT: 6 VOLTS AT 0.005 AMP FOR 48 HOURS OR 6 VOLTS AT 4.0 AMP FOR 12 HOURS. WEIGHT: 8 1/4 POUNDS. 8/24/43 KS-9486 ESA-660586 MAR. 44 ISSUE 1		
10/26/42 X169 APR. 43 SIG.CORPS BA-38 CCG:48825848			3/29/43 CBR:4TA60 CBR:MF2372 SEPT 43					
RA 19039 *SEE BELOW BATTERY POWER UNIT: SUPPLIES OPERATING VOLTAGES FOR NAVY TYPE RA-46201			19046 *GEN USE RE 9031 STORAGE BATTERY: NOMINAL RATING 6.4 V AT 1.2 AMPS. 3 CELL LEAD ACID ELECTROLYTE. 5 AMP-HR CAPACITY MAX DIMENSIONS 2 3/8" HIGH, 3 19/32 WIDE AND 1 13/16" DEEP. WEIGHT 1.9 POUNDS NET. 1.5 POUNDS DRY. CONTAINER AND COVER *FIRST PURCHASE: NX88-31092 FOR USE WITH 4/13/43 CBR:4-T-6 CWB:2626157 SEPT 43 6914 ISSUE A			CGG-19051 MAN STORAGE BATTERY OUTPUT: 6 VOLTS DC. 3 CELLS. CONTAINED IN A VENTED, METAL BOX.  2/4/44 TSR-215 FEB. 44		
*FOR USE WITH ARB OR RU-19 12/18/42 APR. 43								
CEX 19040 RBZ BATTERY POWER UNIT: INCLUDES BATTERY FRAME-HOLDER, ONE NAVY TYPE -19032 "B" BATTERY AND TWO NAVY TYPE -19031 "A" BATTERIES.			19046 HAB POLYSTYRENE. SIMILAR TO -19042.			CJF 19052 GEN RADAR USE PRIMARY BATTERY RESERVE PRIMARY BATTERY. RATED 3.8 AND 90 VOLTS. HAS A 4 PRONG RECEPTACLE. HAS POLYSTYRENE PLASTIC CASE. USES PERCHLORIC ACID AS ELECTROLYTE. TYPE NUMBER INCLUDES 100 CC OF ELECTROLYTE WHICH IS SHIPPED IN SEPARATE CONTAINER BUT WITH 2/22/44 RE 19AA107 MAR. 44		
1/15/43 APR. 43								
CUW 19041 QBG BATTERY BOX: INCLUDES SIX 45 VOLT BATTERIES AND ONE SIX VOLT STORAGE BATTERY (6V-SBM-100AH).			CUO 19047 *GEN USE BATTERY POWER UNIT: POWER UNIT FOR NAVY TYPES -46205, 206, 207, RF TO IF CONVERTERS. INCLUDES 7 BATTERIES, ONE NAVY TYPE -19020 AND 6 NAVY TYPE -19032, TWO OF WHICH ARE SPARES *NX88-26590 6/4/43 NOV. 43			CJF 19052 BATTERY. FILLED BY NAVY TYPE -10224 OR -10324. SAME AS NAVY TYPE -19048 EXCEPT USES 4 PRONG RECEPTACLE.		
1/30/43 APR. 43			CFF:A-321					
CWB 19042 GENERAL USE RE 13A 585 STORAGE BATTERY: NOMINAL RATING 6.4 VOLTS AT 1.2 AMPS. 3 CELL, PERCHLORIC ACID ELECTROLYTE. MAX. DIMENSIONS 2 3/8" HIGH, 3 9/16" WIDE AND 1 13/16" DEEP. 5 AMP-HR CAPACITY WEIGHT 1.9 POUNDS NET, 1.5 POUNDS DRY. CONTAINER AND COVER POLYSTYRENE. SAME AS -19046 2/2/43 CWB:PA-5-6 CWB:26279 NOV. 43 REV A			CBR-19048 FOR USE WITH TDC RE-19AA107 PRIMARY BATTERY: RESERVE PRIMARY TYPE BATTERY. RATED 3.8 AND 90 VOLTS HAS A 3 PRONG RECEPTACLE. HAS SARAN PLASTIC CASE. USES PERCHLORIC ACID AS ELECTROLYTE TYPE NUMBER INCLUDES 75CC OF ELECTROLYTE WHICH IS SHIPPED IN SEPARATE CONTAINER BUT WITH THE BATTERY. 8/3/43 MAR. 44			CBR-19053 GEN. USE RE13A912 PILOT BALLOON BATTERY 2 CELL, 3.2 VOLTS. WATER ACTIVATED. INCLUDES MINIATURE SCREW BASE TO ADMIT MAZDA 263 LAMP.  3/1/44 MAR. 44		
			CWB 19042 EXCEPT FOR ELECTROLYTE.			CWB 19054 MAE-1 STORAGE BATTERY 2 VOLTS, 27 AMPERE HOURS. CONSISTS OF 11 LEAD PLATES AND TWO LEAD ELECTRODES IN A SULPHURIC ACID ELECTROLYTE. SPILL PROOF VENT ON TOP FOR FILLING AND CHARGE INDICATOR CONSISTING OF 3 COLORED BALLS FLOATING IN VERTICAL COLUMNS. 5/25/44 27-2 CKV:A-62322 OCT. 44 REV 1		
			CWB 19043 FILLED BY NAVY TYPE -10224. SAME AS NT 19052 EXCEPT USES 3-PRONG RECEPTACLE.					

ASSIGNED  
ISSUED

ASSIGNED  
ISSUED

DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER	DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER	DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER
------	----------------------------	-------------------------------	------	----------------------------	-------------------------------	------	----------------------------	-------------------------------

RESTRICTED

NAVSHIPS 900,109

3.19-4

Class 19—Batteries

NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION
-----------------------	--------------------	-------------------------------	-----------------------	--------------------	-------------------------------	-----------------------	--------------------	-------------------------------

CKY-19055 MAE-1  
 BATTERY ASSEMBLY  
 CONSISTS OF 3 TYPE -19054 BATTERIES CON-  
 NECTED IN PARALLEL, MOUNTED IN A STEEL  
 CARRYING CASE WITH AMPHENOL TYPE 61F RE-  
 CEPTACLE. FOUR HASPS A TOP OF CASE ARE  
 PROVIDED FOR CONNECTING WITH -43064  
 TRANSMITTER RECEIVER.  
 2/25/44 M-40529-1 M-40529-1  
 JULY 44 REV 0

CWB- 19061\* M8M  
 BATTERY, STORAGE:  
 RATED 6.3V, 25 AMPERE HOURS, PLEXIGLAS  
 CASE 7 1/2" LONG X 2 1/2" WIDE X 6 3/4"  
 HIGH.  
 3/2/45 ERH-25-6  
 APR. 45

C8R- 19056 GEN. SONAR USE  
 BATTERY WATER ACTIVATED  
 6 VOLTS, 12 AMPS FOR 17 MINUTES, 4 CELLS  
 IN SERIES PARALLEL, CYLINDRICAL CYLINDER  
 2 1/4" HIGH AND 2 3/16" IN DIAMETER WITH  
 TWO 1 1/2" LEADS PROTRUING FROM TOP.

9/1/44 4CC167  
 OCT. 44

CWB- 19057 TDM-1  
 STORAGE BATTERY  
 RATED 6 VOLTS, 100 AMPERE HOURS AT 20  
 HOURS DISCHARGE RATE, 3 CELLS, 17 PLATES  
 EACH, RUBBER INSULATED, DIMENSIONS:  
 9 1/16" X 9 13/16" X 8 11/16". WEIGHT:  
 39 POUNDS. ELECTROLYTE: SULPHURIC ACID.

9/27/44 HR-1-100 CJF:X-P-46523  
 MAR. 45

CFL- 19058 MN-5  
 BATTERY BOX  
 CONSISTS OF TYPE SBM-15AH 6 VOLT STOR-  
 AGE BATTERIES INSTALLED IN A PLYWOOD  
 CARRYING CASE TOGETHER WITH NECESSARY  
 FUSES, CIRCUIT BREAKER, VOLTMETER AND  
 RHEOSTAT. BATTERIES PROVIDE 30 AMP HOURS  
 AT 12V DC CONNECTED IN SERIES PARALLEL.  
 10/23/44  
 DEC. 44

CFL- 19058  
 CASE SIZE: IS 17" X 12 1/2" X 12 3/8".

CIA-19059 DBA  
 STORAGE BATTERY UNIT  
 WILLARD TYPE RH-96 IN A WATERPROOF METAL  
 CASE, 12 VOLTS, 50-68 AMPERE HOURS.

11/9/44  
 DE. 44

CATN 19060 SO-7H/SO-7M  
 BATTERY STORAGE  
 RATED 12 VOLTS, 54 AMP. HR. CAPACITY  
 FOR 5 HOURS RATE OF DISCHARGE 6 CELLS,  
 LEAD PLATES, STAND UP TERMINALS WITH  
 WING NUTS. HARD RUBBER CASE, DIMENSIONS  
 10 9/16" X 5 1/2" X 11 5/16". SHIPPED  
 DRY, CHARGED LESS ACID IN SEPARATE CON-  
 TAINER.  
 1/15/45 C2 CATN:B-32914  
 FEB. 45

CATN 19060  
 TAINER. USED IN GASOLINE ENGINE GENER-  
 ATOR-SOURCE OF IGNITION POWER.

DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER	ASSIGNED ISSUED	DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER	ASSIGNED ISSUED	DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER
------	----------------------------	-------------------------------	-----------------	------	----------------------------	-------------------------------	-----------------	------	----------------------------	-------------------------------