


**CODED TOOLS**  
**NO. 407A TO 418A**


**DESCRIPTION**

**TOOL, 407A**

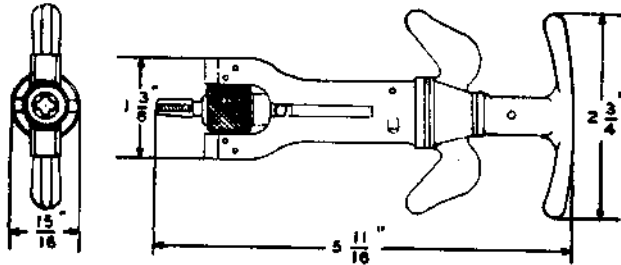


Sleeve remover.  
Replaces the No. 123 tool.  
For use in removing worn sleeves of 49- and 141-type jacks.

**TOOL, 408A**

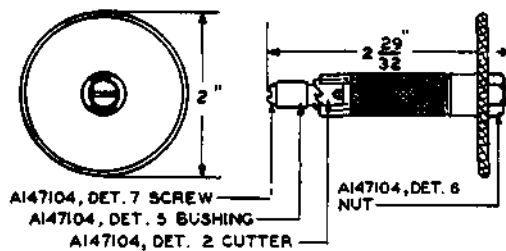


Jack mounting counterbore  
For counterboring jack mountings to accommodate the shoulder of a replacement sleeve for worn 141-type jacks.

**TOOL, 409A**

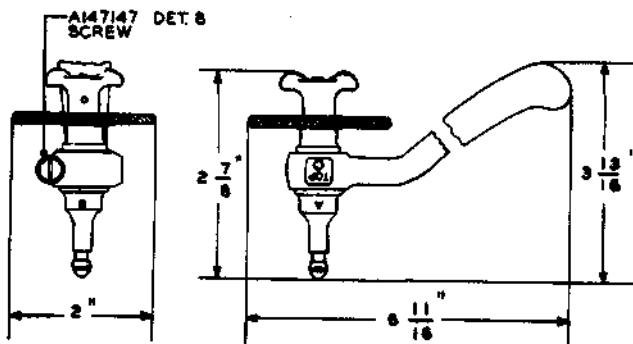


Jack sleeve crimper.  
For use in crimping the replacement sleeves of 49- and 141-type jacks.

**TOOL, 410A**

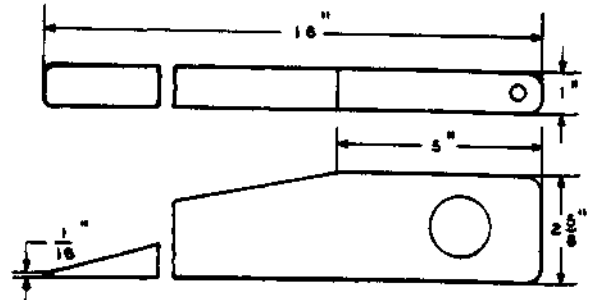


Hardwood wedge.  
Replaces the No. 93 tool.  
For use in lifting multiple cable.

**TOOL, 410B**

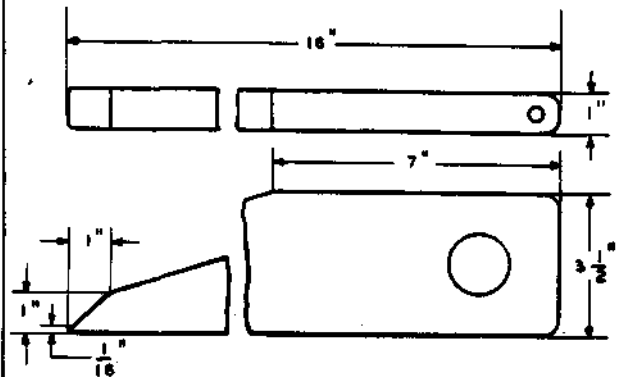


Hardwood wedge. The slanted end of the tool may be cut to any required length.  
Replaces the No. 93 tool.  
For use in lifting multiple cable.

**TOOL, 411A**

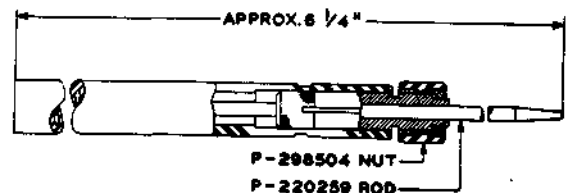

Test pick. This tool may be connected to a No. 893 cord by means of a 360-type tool.  
Replaces the No. 298 tool.  
For general use in circuit testing.


TOOL, 411B

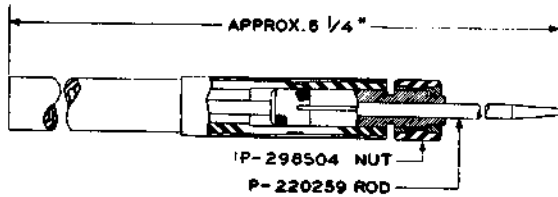

Test Pick. Same as 411A except that at the chuck end the handle is covered with insulating tubing which insulates a metal ring around the handle.

For testing oscillator circuits.


TOOL, 412A

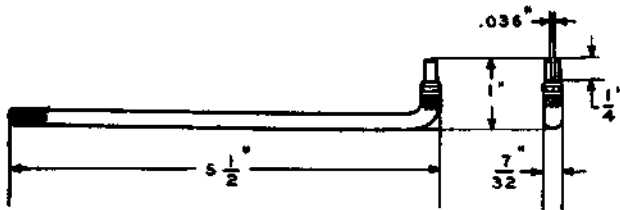

Spring adjuster.

For use on 202-, 211- and 212-type switches and 229-, 230- and 232-type relays.

TOOL, 414B

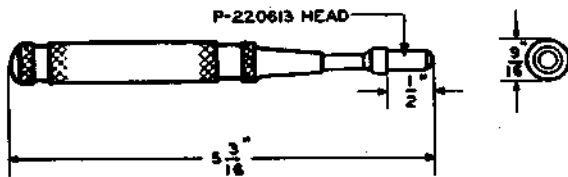


Automatic hammer

For use on 49- and 141-type jacks.

TOOL, 415A Manufacture Discontinued.  
Replaced by the No. 415B tool.

TOOL, 415B

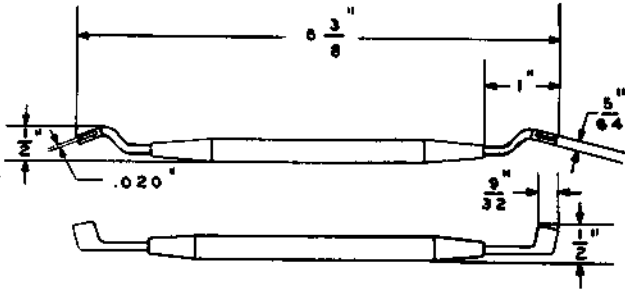


Spring adjuster.

Replaces the No. 415A tool.

For use on 197- and 198-type switches and step-by-step type relays.

TOOL, 416A Manufacture Discontinued.  
Replaced by the No. 416B tool.

TOOL, 416B

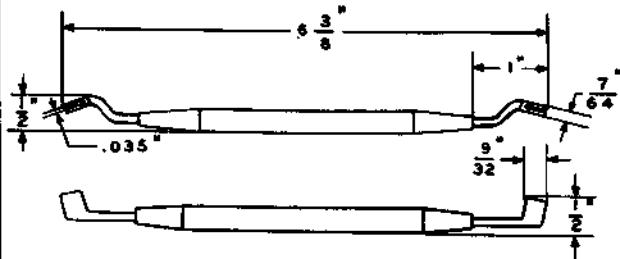


Spring adjuster.

Replaces AECO spring adjuster H-20777, and the No. 416A tool.

For use on relays, and 197-, 198-, 211-, 212- and plunger-type line and out trunk switches.

TOOL, 417A

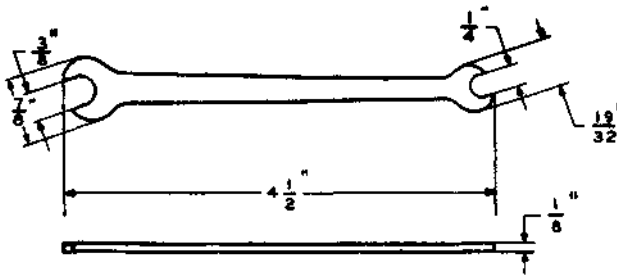


1/4" and 3/8" Hex. open double end flat wrench.

Replaces the Nos. 244 and 306 tools and the 1/4" and 3/8" ends of AECO H-7062, H-7063 and H-42316 Hex. open end flat wrenches.

For general use.

TOOL, 418A

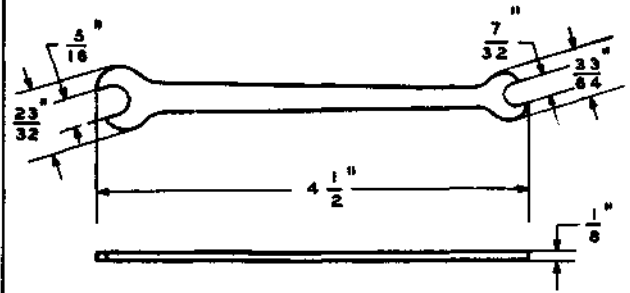

5/16" and 7/32" Hex. open double end flat wrench.

Replaces the 7/32" and 5/16" ends of AECO H-7062 and H-7063 Hex. open end flat wrenches.

For general use.