



NONCODED TOOLS
HOLDERS, HOLSTERS, HONES, HOOKS, HOSES
DESCRIPTION

HOLDER, APCO-MOSSBERG CO., NO. 825




For use with 1/4-inch square drive supplied with Apco-Mossberg Co. No. B50 torque screw-driver.

HOLDER, KS-20545 L1

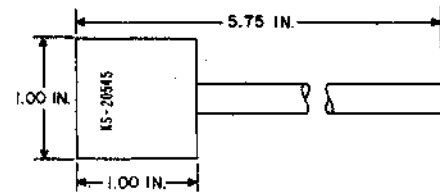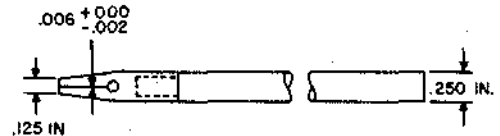


HOLDER, KS-16913 L1

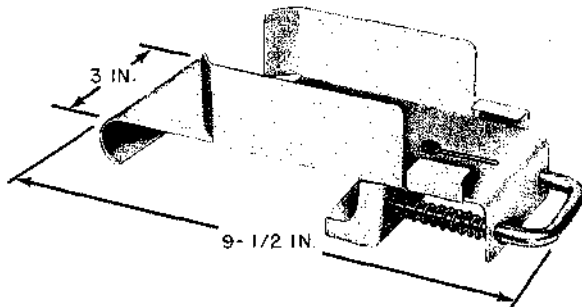

Replaces the KS-13506 Holder.


Provided with a clamp for mounting on a central office ladder. For holding KS-13501 L2 and similar applicators when not in actual use.

HOLDER, BRUSH, R-2598

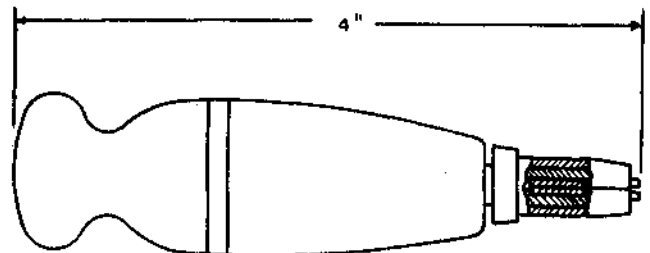

For use as a handle for the KS-13604 brush.

HOLSTER, KS-16921 L1

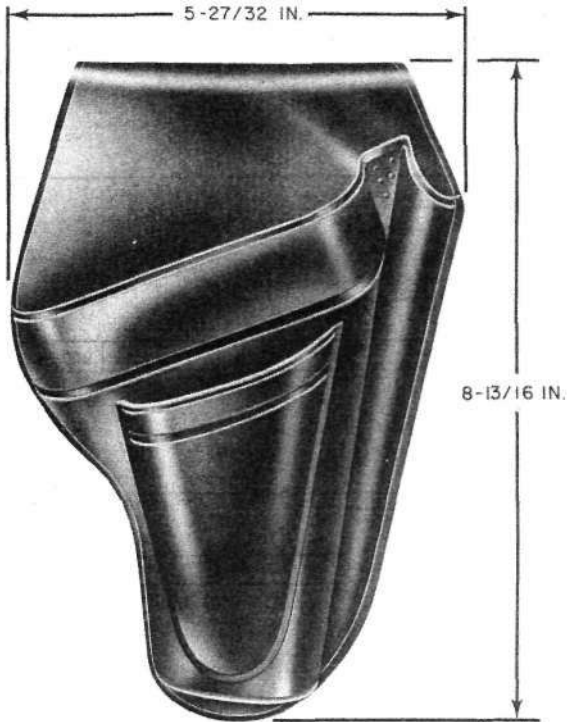

A flap is provided on the rear of the holster to allow the holster to be attached to a belt.


For use in storing or carrying the KS-16363 Wire Wrapping Tool, the KS-16492 L2 Wire Unwrapping Tool, and the R-3088 Wire Stripper.

HONE, INSTRUMENT, THE CARBORUNDUM CO. NO. 100 (OR EQUIVALENT)

Size: 4 x 1 x 3/8"

For use in sharpening the dental scrapper when used on banks associated with 197- and 198-type switches.

HOOK, SHAVE, B

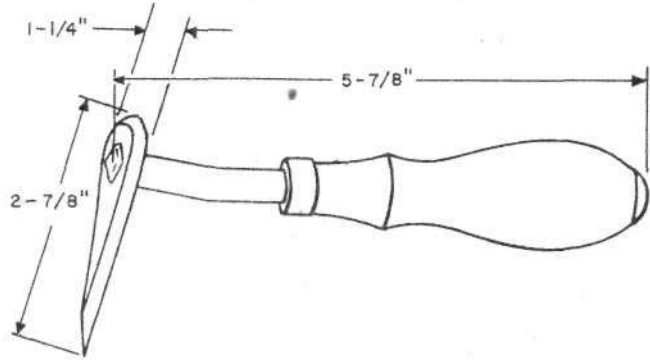


Replaces Shave Hook AT-6892

Order also, B shave hook guard, if required.


For use in cleaning and preparing lead cable sheath and sleeves for soldering and wiping joints.

(Spec. AT-7151)

HOOK, SPRING, PULL, TP75765

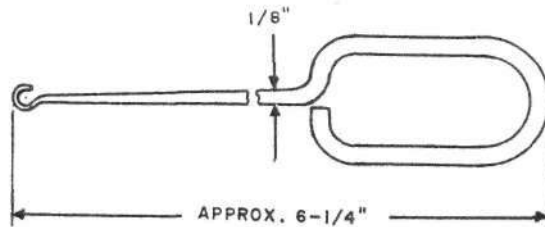

For use on No. 1A regenerator units.

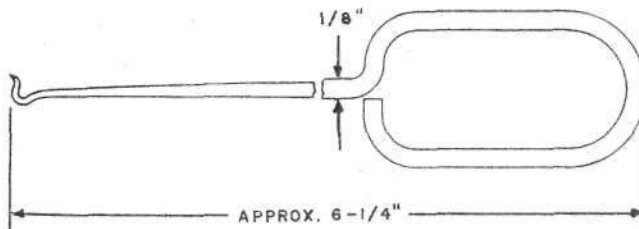HOOK, SPRING PUSH, TP75503


For use in attaching selector elevator apparatus trip rod rotating lever retractile springs and on No. 1A regenerator units.

HOOK, EXTRACTOR, R-1919

"Mfr Disc"

HOSES, PRESSURE, B, C, D, AND E

(In ordering, specify B, C, D, or E, and length of hose desired.)

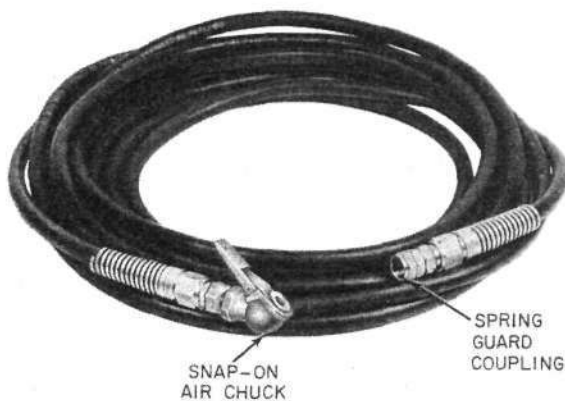

B HOSE ILLUSTRATED

The B and C pressure hoses, available in any desired length, are equipped at one end with a spring guard coupling. The other end of the B hose is equipped with a spring guard coupling and a snap-on air chuck. The other end of the C hose is equipped with a screw-on angle connector.

The D pressure hose, available in 6, 12-1/2, and 25 foot lengths, is equipped at both ends with a spring guard coupling.

The E pressure hose, available in 10 and 30 foot lengths, is equipped at both ends with a spring guard coupling.

The fittings* for the B, C, D, and E pressure hoses may be ordered as replacement parts. When replacing an angle connector in the field, order a hose clamp for securing the connector and discard the ferrule originally provided.

Replacement parts for B, C, D, and E pressure hoses, may be ordered as follows:

Chuck, Air
 Clamp, Hose (AT-7320X)
 Connector, Angle, Hose, 3/16" (AT-7656X)
 Coupling, Hose

Replaces the A, Schrader's Son No. 6739 Air Chuck.

For use in making connections to acetylene and similar type regulators, torches, pressure testing valves, and heaters.

(Spec. AT-7676)