


ASSOCIATED CABLES		
95054	CABLE	A.C.
95055	CABLE	D.C.
95056	CABLE	A.C.
95057	CABLE	D.C.
95058	CABLE	D.C.
95059	CABLE	A.C.
95060	CABLE	D.C.
95061	CABLE	D.C.
95062	CABLE	D.C.
95063	CABLE	D.C.
95064	CABLE	A.C.
95065	CABLE	A.C.

WIRE COLOR CODE	
CODE	SOLID COLOR OR TRACER IN WHITE WIRE
BK	BLACK
W	WHITE
R	RED
G	GREEN
O	ORANGE
BL	BLUE

ALL WIRES ARE BLACK UNLESS OTHERWISE DESIGNATED

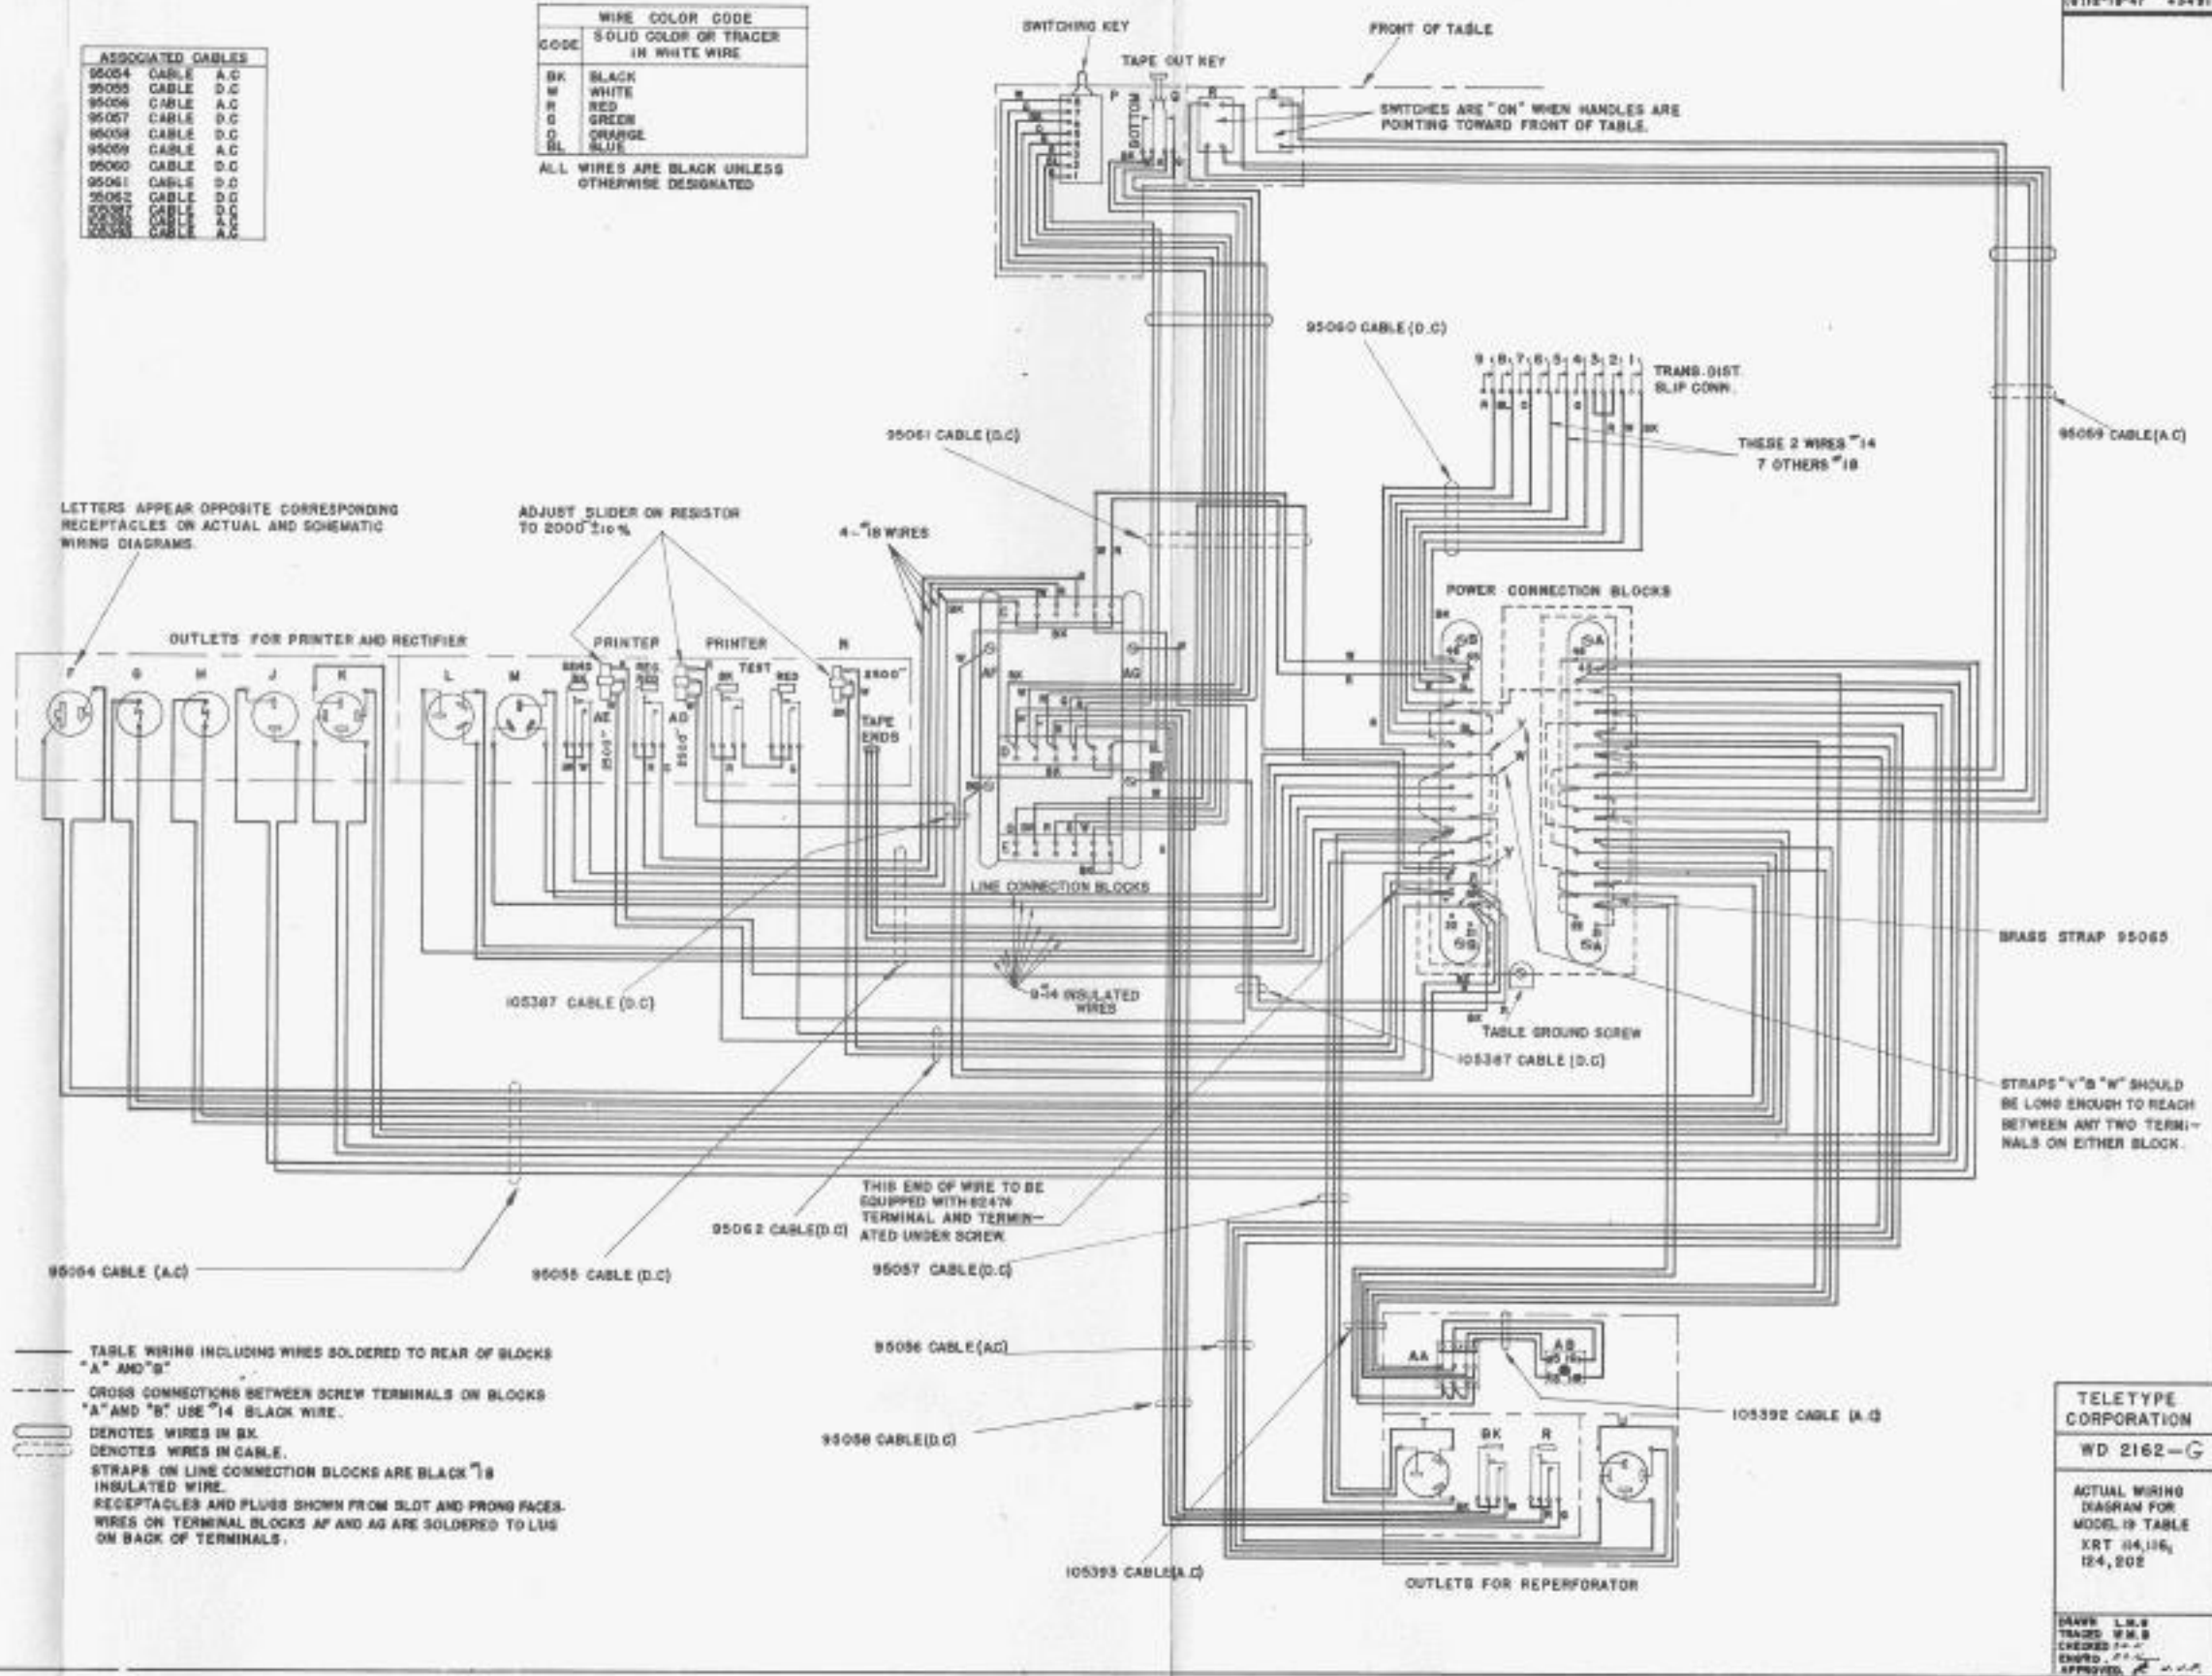

LETTERS APPEAR OPPOSITE CORRESPONDING RECEPTACLES ON ACTUAL AND SCHEMATIC WIRING DIAGRAMS.

ADJUST SLIDER ON RESISTOR TO 2000 ±10%

SWITCHES ARE "ON" WHEN HANDLES ARE POINTING TOWARD FRONT OF TABLE.

BRASS STRAP 95065  
STRAPS "V" "B" "W" SHOULD BE LONG ENOUGH TO REACH BETWEEN ANY TWO TERMINALS ON EITHER BLOCK.

— TABLE WIRING INCLUDING WIRES SOLDERED TO REAR OF BLOCKS "A" AND "B"  
 - - - CROSS CONNECTIONS BETWEEN SCREW TERMINALS ON BLOCKS "A" AND "B" USE #14 BLACK WIRE.  
 (Solid line) DENOTES WIRES IN BK.  
 (Dashed line) DENOTES WIRES IN CABLE.  
 (Strap symbol) STRAPS ON LINE CONNECTION BLOCKS ARE BLACK #18 INSULATED WIRE.  
 RECEPTACLES AND PLUGS SHOWN FROM SLOT AND PRONG FACES. WIRES ON TERMINAL BLOCKS AP AND AG ARE SOLDERED TO LUGS ON BACK OF TERMINALS.

TELETYPE CORPORATION  
 WD 2162-G  
 ACTUAL WIRING DIAGRAM FOR MODEL 19 TABLE XRT 124,126, 124,202  
 DRAWN L.S.S.  
 TRACED W.M.S.  
 CHECKED J.P.  
 ENGRD. J.P.  
 APPROVED