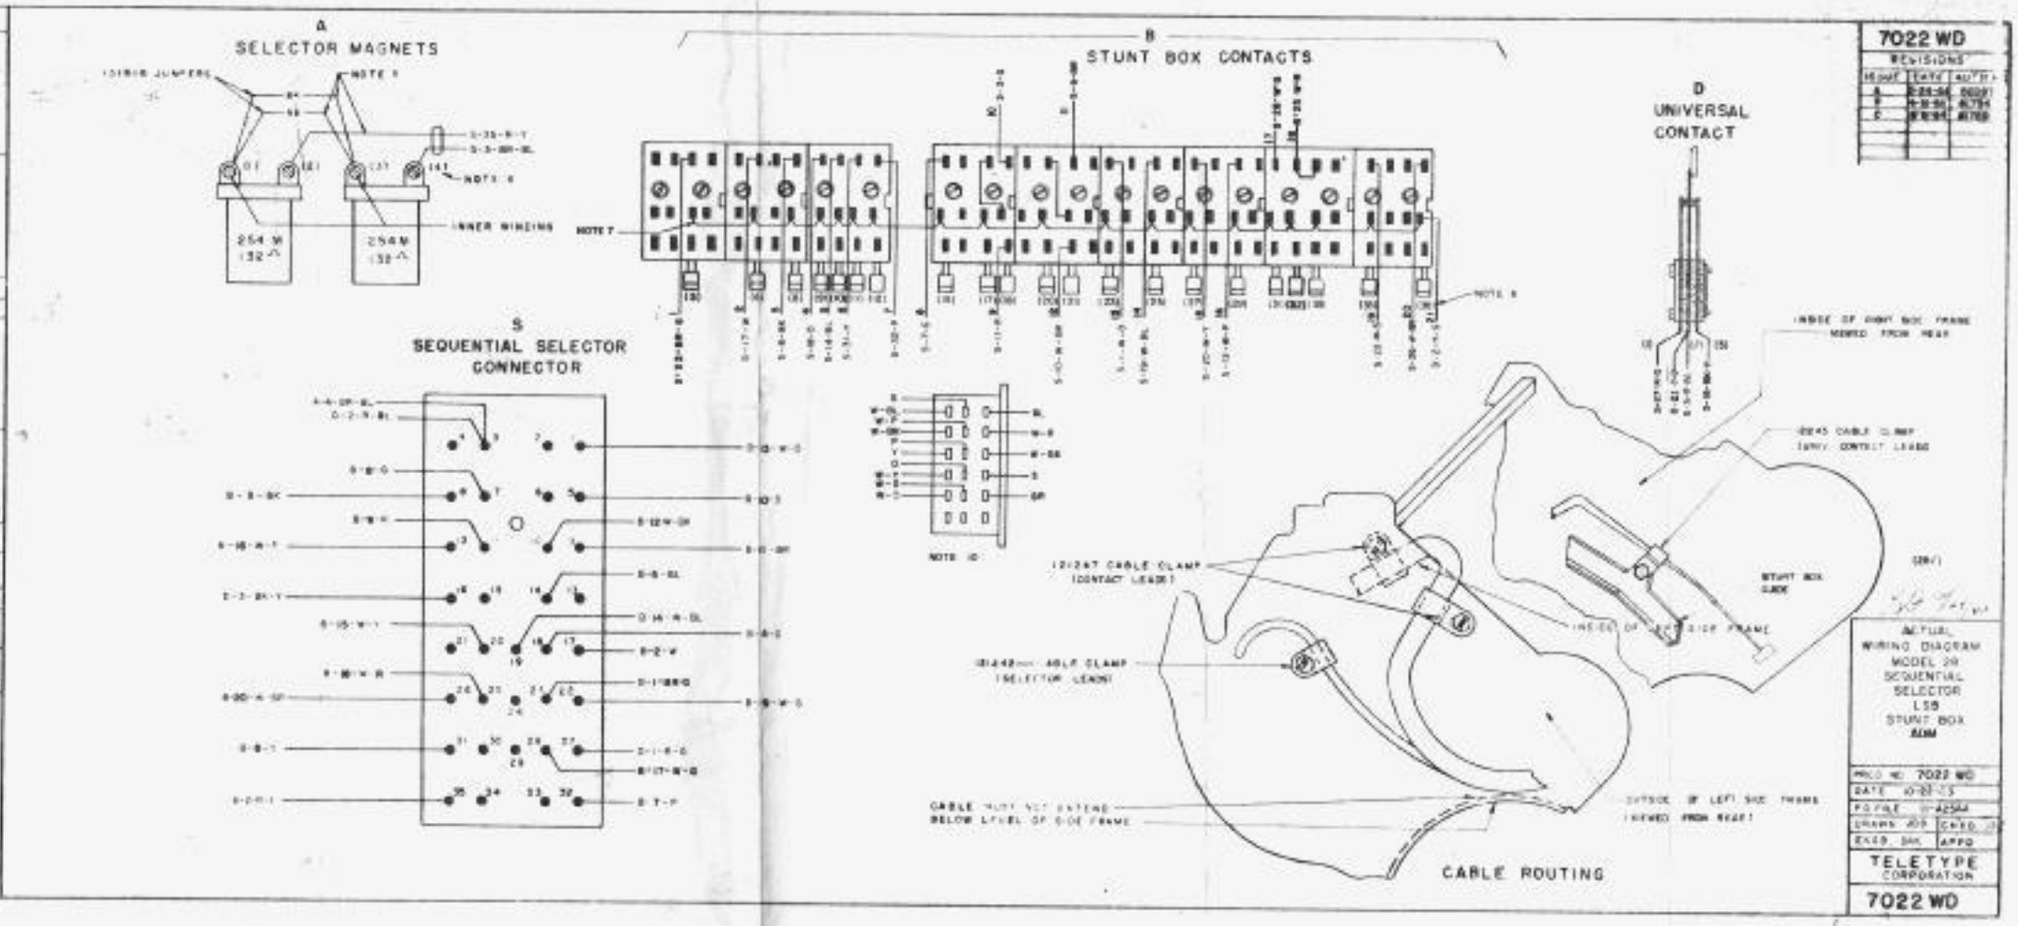NO.	NOTES
1	WIRING CODE: DISTANT TERMINATING CABLE; STUNT TERMINAL DESIGNATION; WIRE COLOR CODE
2	COLOR CODE: BK - BLACK; W - WHITE; Y - YELLOW; P - PURPLE; S - SLATE; BL - BLUE; R - RED; BR - BROWN; O - ORANGE; G - GREEN
3	CONNECTOR VIEWED FROM SOLDERED TERMINAL END
4	CONTACT ARM; STRAIGHT — F CONTACT NORMALLY CLOSED; CROSSED — F CONTACT NORMALLY OPEN
5	UNIT WIRED FOR 120 AMP NEUTRAL SIGNAL LINE OPERATION, FOR 060 AMP OPERATION MOVE BK-Y LEAD FROM TERMINAL (3) OF THE SELECTOR MAGNETS TO TERMINAL (1) ALSO MOVE END OF ONE BLOCK JUMPER FROM TERMINAL (1) TO (2) AND END OF OTHER JUMPER FROM TERMINAL (2) TO (1)
6	TERMINAL DESIGNATIONS ENCLOSED IN PARENTHESES ARE NOT MARKED ON COMPONENTS
7	SHRINK STRAP, 600MM SLEEVING (NOT REQUIRED WHEN STRAPPING ADJACENT TERMINALS)
8	INDICATE SLOT LOCATIONS
9	INDICATES CABLES: 0000A, 0000-7
10	THE 0000-7 CABLE ASSEMBLY EQUIPPED WITH COOK HEADING CONTACTS IS PART OF LSS. THE TINNED END OF THIS CABLE WILL BE WIRED BY THE CUSTOMER.