


- NO. NOTES
1. FOR ACTUAL WIRING DIAGRAMS OF INDIVIDUAL UNITS SEE WD NUMBER UNITS DIRECTLY OPERABLE WITH LESU12
- | | |
|---------|-----------------------------------|
| 3344 WD | ELECTRICAL SERVICE UNIT LESU 12 |
| 2900 WD | MOTOR UNITS - L.M.U. 3,4,6. |
| 3319 WD | TYPING REPERFORATOR BASE LRB 3,11 |
2. LEGEND
- O G 3-POINT CONNECTOR (ON BASE)
 - O DG TERMINAL BLOCK (ON BASE)
 - O DH TERMINAL BLOCK (ON BASE)
 - ◀ F 16-POINT CONNECTOR
 - O A TERMINAL BLOCK (IN LESU)
 - O B TERMINAL BLOCK (IN LESU)
 - O D TERMINAL BLOCK (IN LESU)
 - O E TERMINAL BLOCK (IN LESU)
 - O J ① TERMINAL STRIP ON LINE RELAY (IN LESU)
 - ◀ J ② LINE RELAY CONNECTOR (IN LESU)
 - O J ③ LINE RELAY FILTER (IN LESU)
3. DOT-DASH (---) LINES INDICATE FILTERING, SHIELDING AND SUPPRESSION NETWORKS.
4. ALL APPARATUS IS SHOWN IN UNOPERATED OR DE-ENERGIZED POSITIONS.
5. (A) RESISTANCE VALUES IN OHMS (Ω)
(B) INDUCTANCE VALUES IN MICROHENRIES (MH)
(C) CAPACITANCE VALUES IN MICROFARADS (MFD)
6. CIRCUITS SHOWN FOR .060 AMP. NEUTRAL SIGNAL LINE OPERATION. FOR .020 AMP LINE CURRENT, ADD DASH LINE (---) CONNECTION AND OMIT CONNECTION MARKED (---) IN LINE RELAY.
7. USE SYNCHRONOUS MOTOR ON REGULATED 60 Hz (±1%) A.C. POWER ONLY GOVERNED MOTORS AND OTHER POWER CIRCUITS OPERABLE ON 50 TO 60 Hz UNREGULATED A.C.
8. RECTIFIER SHOWN CONTROLLED BY POWER SWITCH
9. LINE SHUNT RELAY SHOWN CONTROLLED BY POWER SWITCH AND SHUNTING LINE RELAY COIL.
10. FOR SPECIAL APPLICATIONS WHEN LESU 12 IS USED WITH LRB 20, THE FOLLOWING NOTE APPLIES: SELECTOR MAGNETS CAN BE OPERATED DIRECTLY IN A NEUTRAL SIGNAL LINE AS FOLLOWS
- REMOVE LINE RELAY FOR 20 MILLIAMPERE, 60 AND 75 WPM OPERATION (OR ANY INTERMEDIATE SPEED.)
1. STRAP A5 TO A3
 2. MOVE BLUE LEAD FROM TERMINAL A8 TO A6.
- FOR 60 MILLIAMPERE, 60, 75 & 100 WPM OPERATION (OR ANY INTERMEDIATE SPEED)
- 1 AND 2 SAME AS ABOVE
 3. ADD DASHED (---) LEAD, OMIT * LEAD ON SELECTOR MAGNETS (REFER TO 3342 WD)

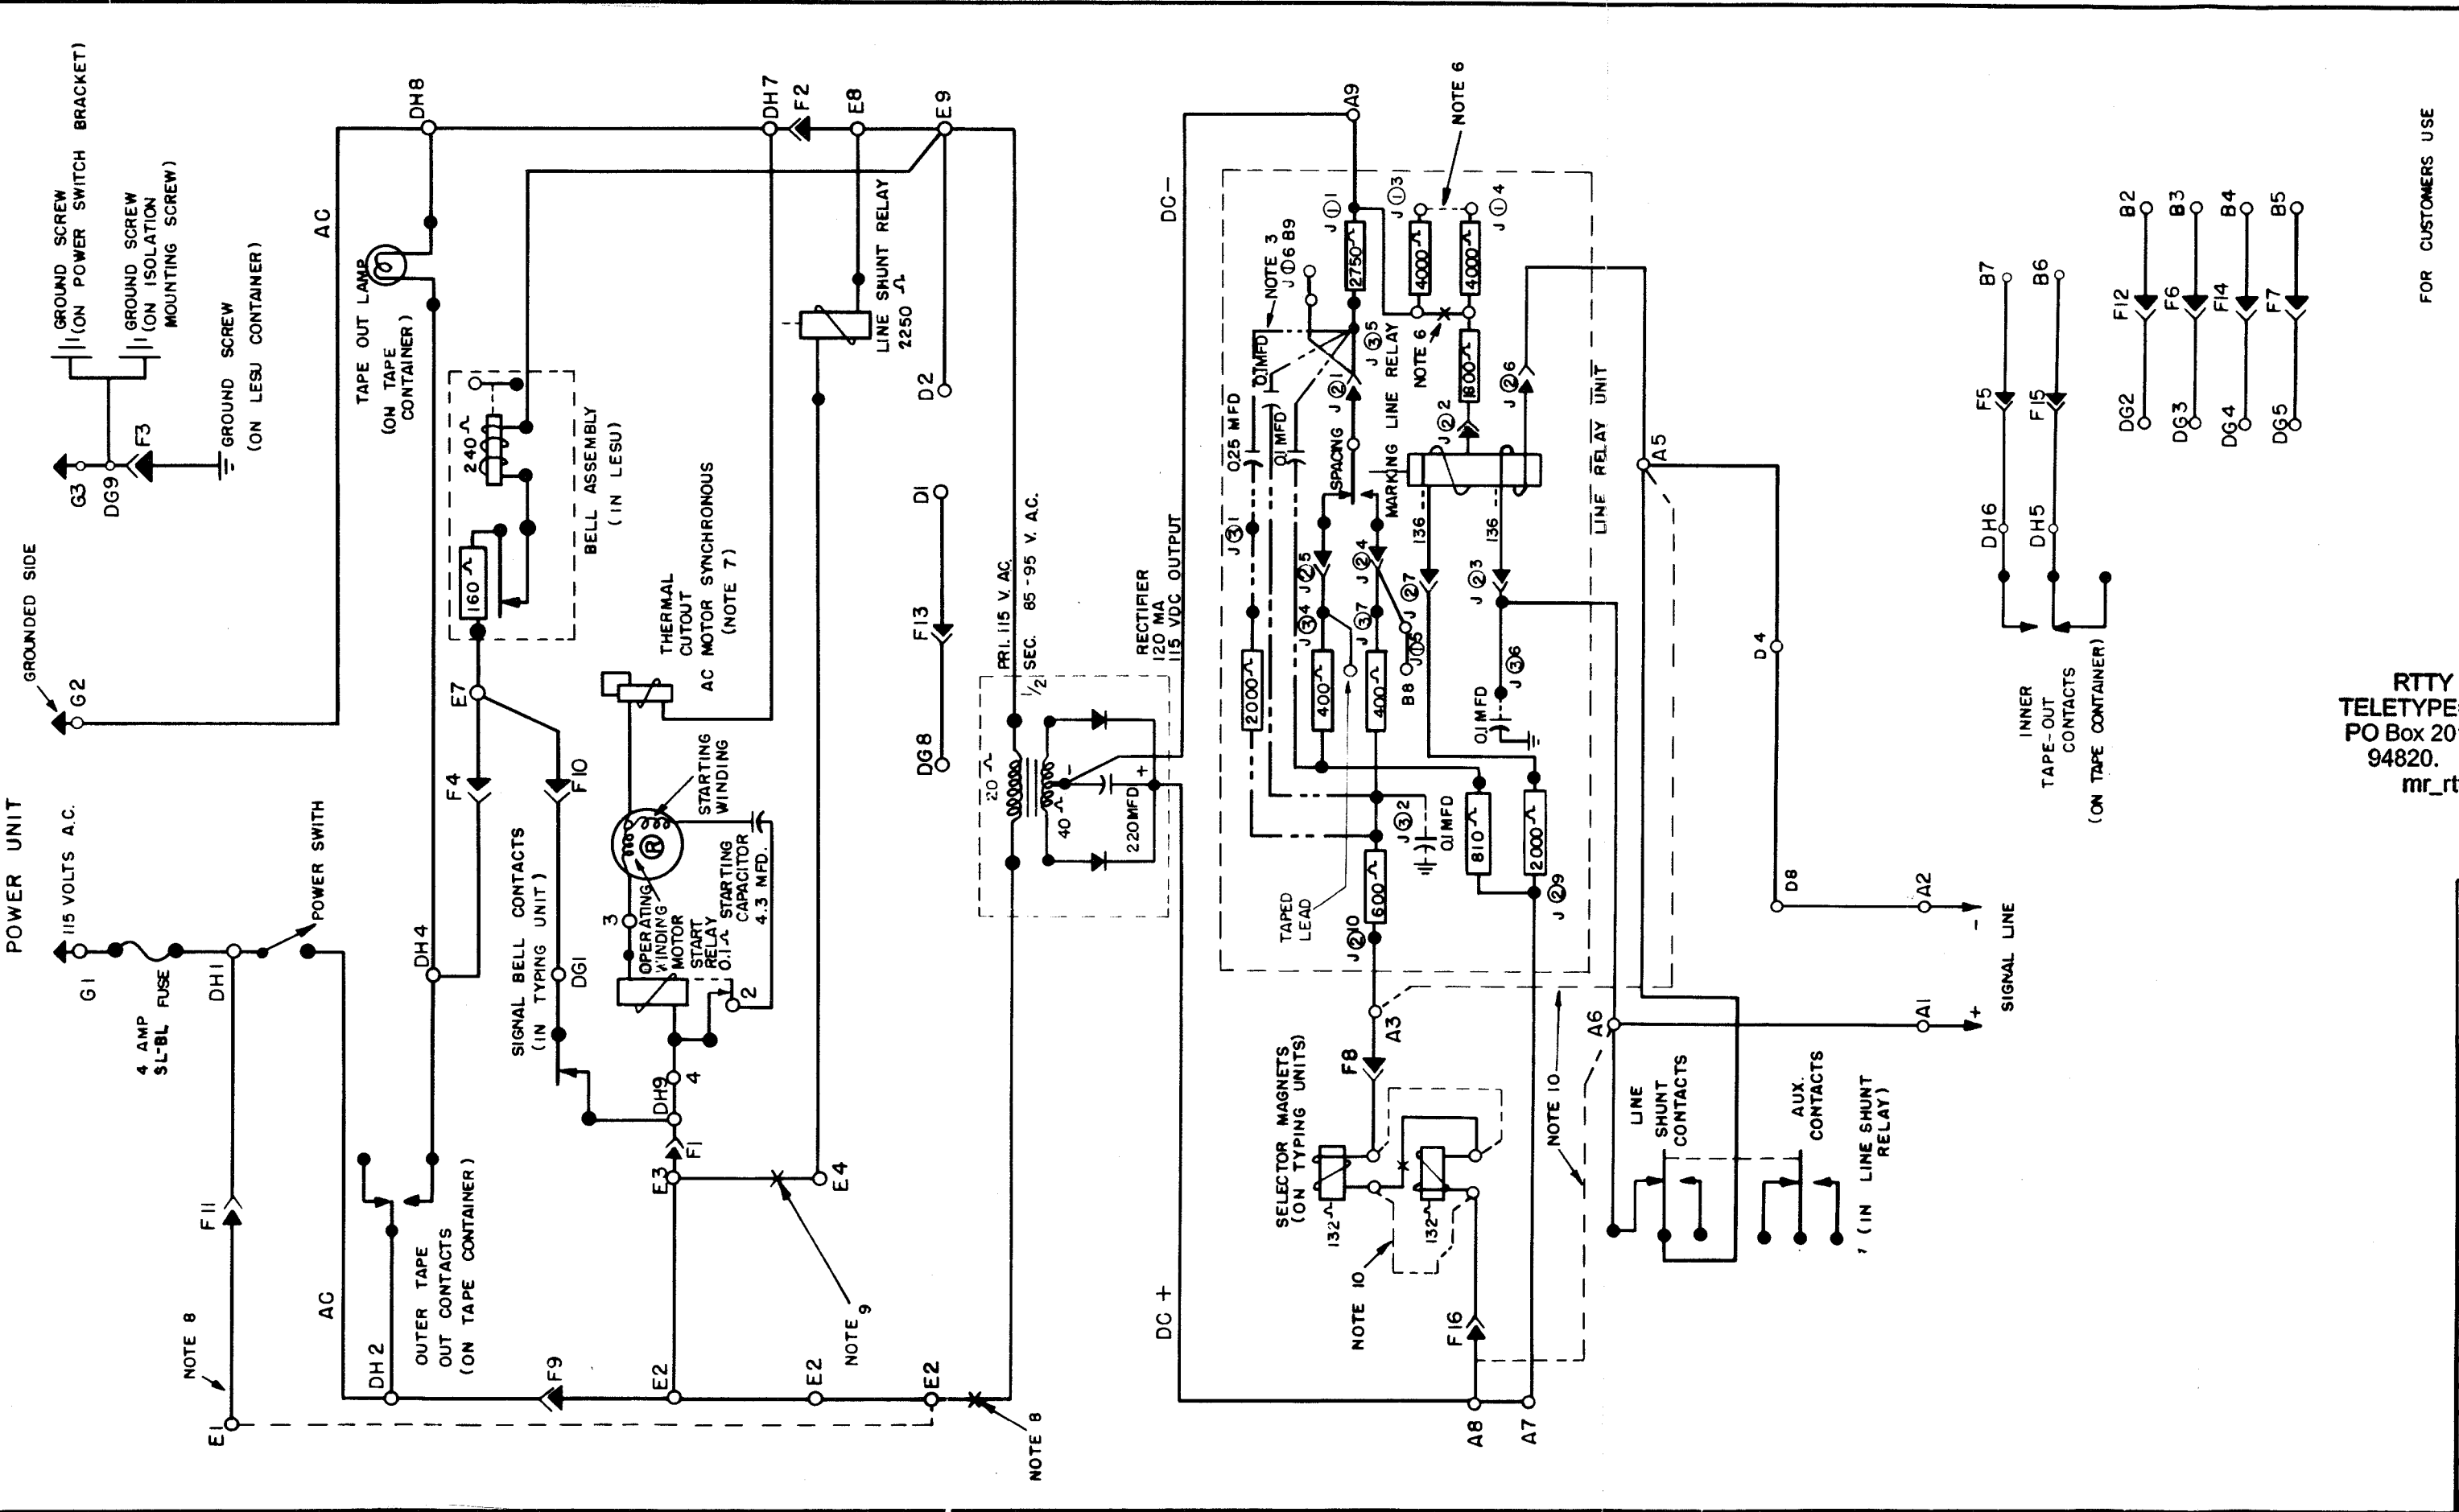

3343 WD

REVISIONS		
ISSUE	DATE	AUTH. NO.
H	4-21-60	28-13089-1
J	11-8-60	28-13973-1
K	3-24-61	68-761-19
L	12-7-61	71860
M	3-28-62	69788-10
P	11-26-63	78875

FOR CUSTOMERS USE

RTTY ELECTRONICS
TELETYPE=Sales-Service-Parts
PO Box 20101 El Sobrante, Ca.
94820. (510)222-3102
mr_rtty@pacbell.net

SCHEMATIC WIRING DIAGRAM MODEL 28

REPERFORATOR BASE LRB 3,11

ELECT SERVICE UNIT LESU 12

APPROVALS

D AND R	E OF M
---------	--------

E-NUMBER 104027

PROD. NO. 3343 WD

DATE 6-27-67

P.D. FILE NO. 1-49.65AA

DRAWN E.R. CHKD G.C.

ENGD H.S.P. APPROVED

TELETYPE CORPORATION

3343 WD