


3835 WD

REVISIONS

ISSUE	DATE	AUTH. NO.
A	6/19/61	70235
B 3	11/1/61	71487
E 4	2/9/62	72430
B 5	2/28/62	72636
6	10-27-65	89078


RTTY ELECTRONICS
TELETYPE=Sales-Service-Parts
PO Box 20101 El Sobrante, Ca.
94820. (510)222-3102
mr_rtty@pacbell.net

- NO NOTES
1. WIRING LEGEND:
DISTANT TERMINATING AREA
DISTANT TERMINATING DESIGNATION
AA-47-W-BR
WIRE COLOR CODE
 2. COLOR CODE:
BL - BLUE G - GREEN
BR - BROWN P - PURPLE
BK - BLACK S - SLATE
O - ORANGE W - WHITE
Y - YELLOW R - RED
 3. INDICATES SHIELDED WIRE
24 GAGE.
 4. USE SLEEVING TO INSULATE WHERE NECESSARY.
 5. FOR SURFACE WIRING USE 24 GAGE TYPE BG
31784RM GREEN WIRE EXCEPT WHERE COLOR
CODED WIRE IS NOTED.
 6. USE 24 GAGE STRAPPING WIRE 39603RM TO
WIRE ADJACENT TERMINALS AND LONG
STRAIGHT RUNS.
 7. USE 18 GAGE WIRE.
 8. FOR SCHEMATIC WIRING DIAGRAM REFER TO
3831WD.
 9. INDICATES TWO CONDUCTOR SHIELDED
WIRE 31814RM.
 10. JUMPER CLIP 17734I
REPLACED BY 193220

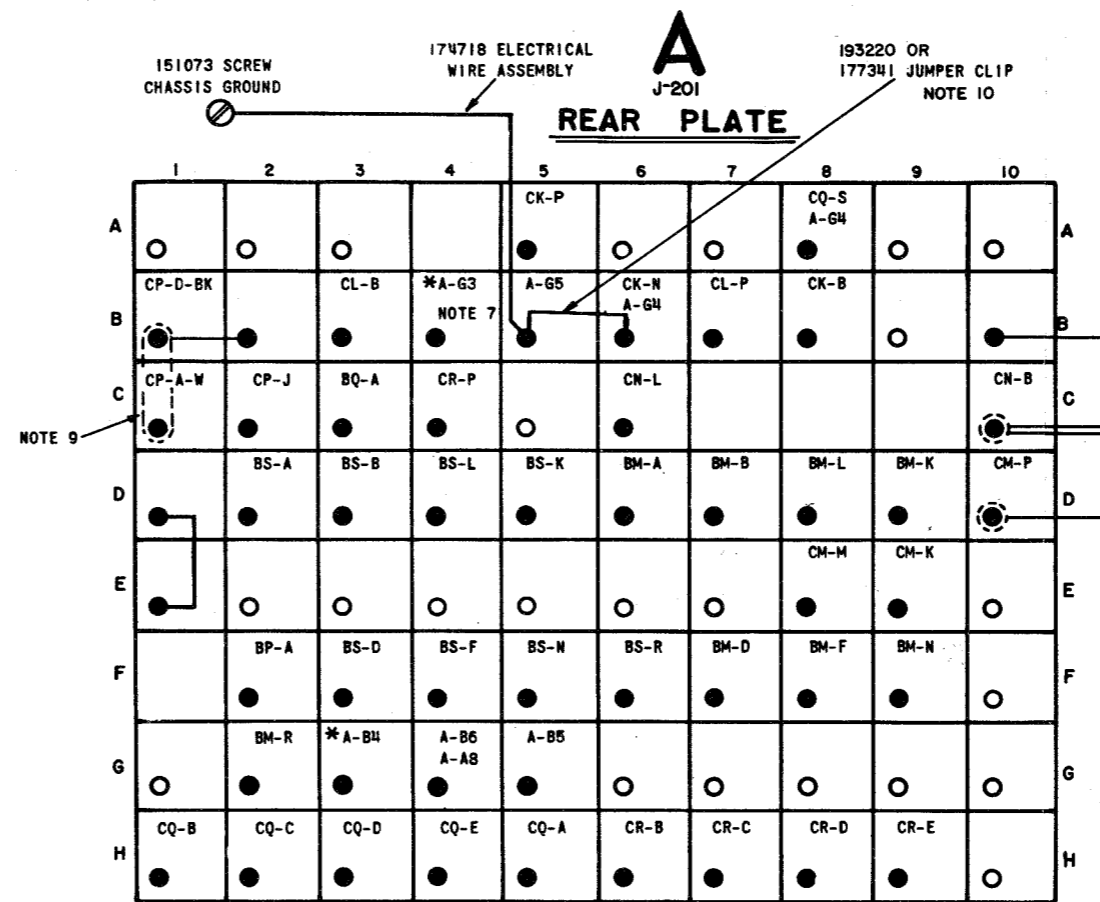

MODULE WIRING DIAGRAM

BM BN BP BQ BR BS FRONT

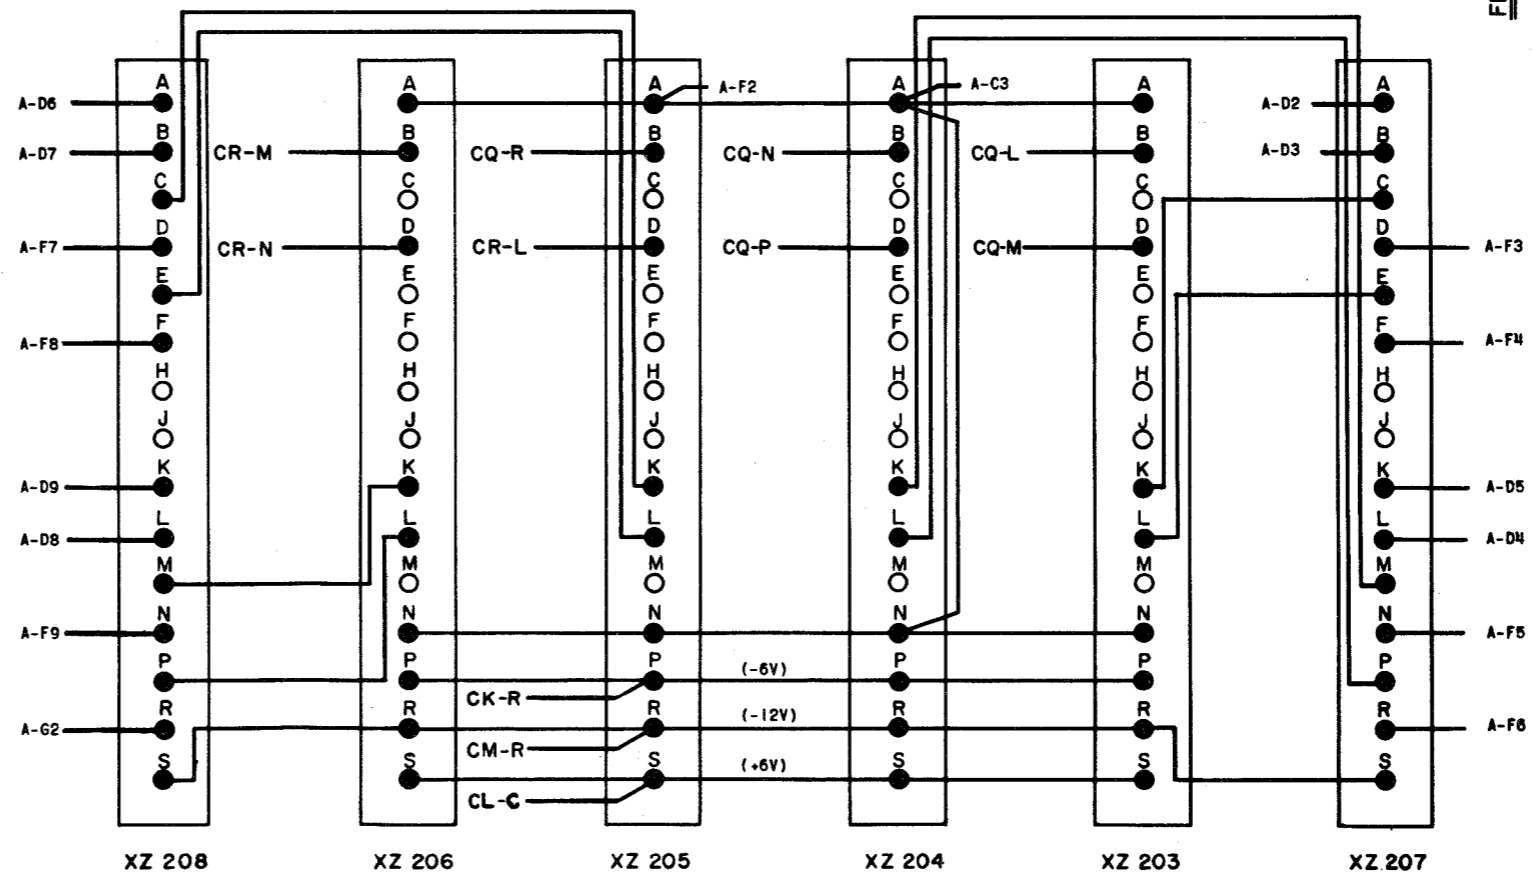

SHEET 1 OF 2

ACTUAL WIRING DIAGRAM FOR HIGH SPEED TRANSMITTING SIGNAL CONVERTER TTSC 500,800

APPROVALS

D AND R	E OF M
---------	--------

E-NUMBER

PROD. NO. 3835WD

DATE 12/28/59

P.D. FILE NO. 1-11.134AA

DRAWN J.P.S. CHKD.

ENGD. E.H.P. APPD.

TELETYPE CORPORATION

3835 WD

