NO.	NOTES
1.	REMOVE STRAP FROM F-10 & E-10 IF TERMINAL IS REQUIRED FOR CIRCUIT CONNECTION.
2.	§ INDICATES 18 AWG WIRE. π " " " SHIELDED WIRE # " 24 " TW. PR. SHIELDED WIRE @ " 22 " " " " " " ALL OTHER WIRES ARE 24 AWG.
3.	ASSOCIATED CABLE ASSEMBLIES: 190311, 190329 & 190330.
4.	FOR SCHEMATIC SEE 4637 WD.
5.	
6.	TERMINAL DESIGNATIONS ENCLOSED IN PARENTHESIS ARE NOT MARKED ON COMPONENT.
7.	CONNECTIONS TO TB 6901 WHEN 177010 SELECTOR MAGNET DRIVER IS USED.

RTTY ELECTRONICS
TELETYPE=Sales-Service-Parts
PO Box 20101 El Sobrante, Ca.
94820. (510)222-3102
mr_rtty@pacbell.net

STAMP BLACK CHARACTERS 3/16 HIGH IN APPROX. POSITION SHOWN.



E
TERMINAL STRIP
(LOWER)
TB-6901



F
TERMINAL STRIP
(UPPER)
TB-6902

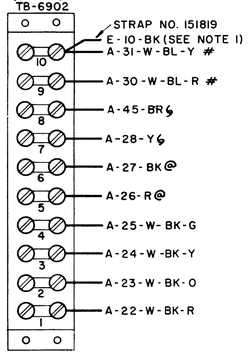

C
POWER FACTOR CAPACITORS



D



A
CONNECTOR

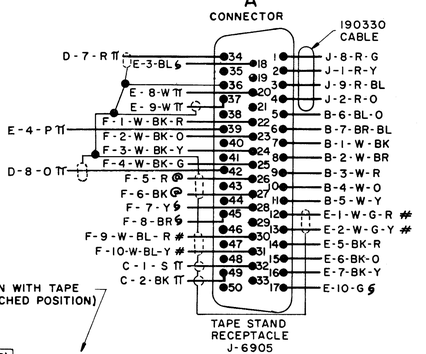

SWITCHES SHOWN WITH TAPE ARM IN UP (LATCHED POSITION)



J
CONNECTOR
TAPE BIN RECEPTACLE
J-6906



TAPE BIN

H
CONNECTOR
TAPE BIN PLUG
P-6906



G
FULL TAPE-BIN SWITCH
(MOD. KIT)
S-6904

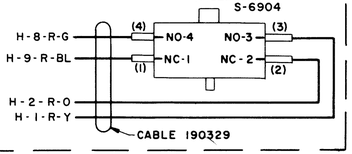

4636 WD

REVISIONS

ISSUE	DATE	AUTH. NO.
2	1-14-63	75861
3	12-15-61	76040
4	1-28-64	76580
5	5-6-64	76996
6	11-15-64	78256
7	10-15-65	80089

APPROVALS

D AND R	E OF M

E-NUMBER

PROD. NO. 4636 WD

ACTUAL WIRING DIAGRAM FOR LTHS 212 TAPE HANDLING STAND MODEL 28 L/H

DATE:	9-20-62
PD.FILE NO.	5.55.25.220 A
DWN. V.E.S.	CHKD.
ENGD. L.H.	APPD.

TELETYPE CORPORATION

4636 WD