


ALL CONTACTS SHOWN IN UNOPERATED POSITIONS:






THE NUMBERS ENCLOSED BY PARENTHESIS ARE USED FOR REFERENCE AND ARE NOT NECESSARILY SHOWN ON THE PARTS.

115V. 10% AC POWER TO BE USED ON CLUTCH TRIP MAGNET ASSEMBLY CIRCUIT (256M COIL ASSEMBLIES). IF DC IS USED CURRENT MUST BE LIMITED TO .100 AMP. BY AN EXTERNAL RESISTANCE:
 a. 1000 Ω FOR 120 VOLTS ± 10 VOLTS
 b. 350 Ω FOR 50 VOLTS ± 10 VOLTS

ACTUAL WIRING DIAGRAM NOS. FOR ASSOCIATED UNITS:
 LMU19 — 2900WD
 LXI — 4126WD
 LX4 — 5889WD

RTTY ELECTRONICS
 TELETYPE=Sales-Service-Parts
 PO Box 2010, El Sobrante, Ca.
 94820. (510)222-3102
 mr_rtty@pacbell.net

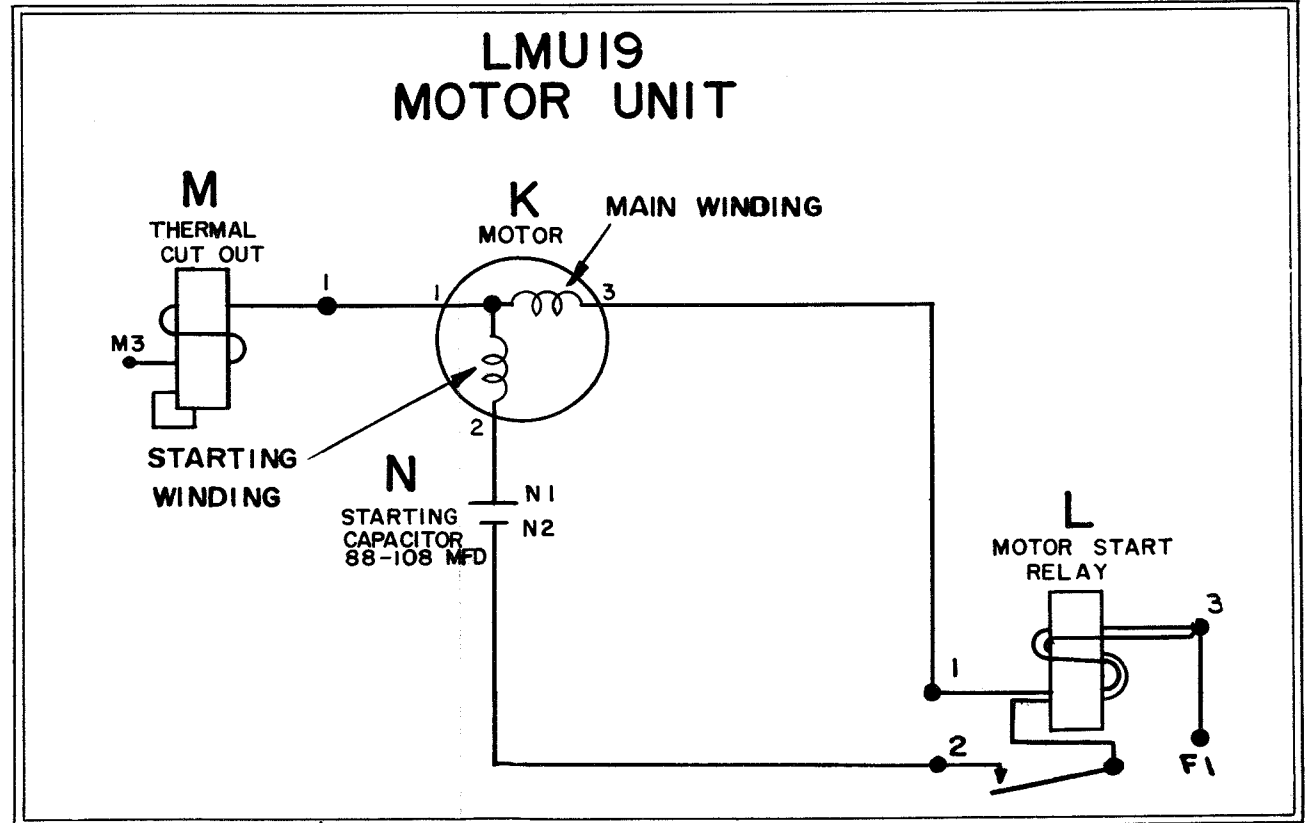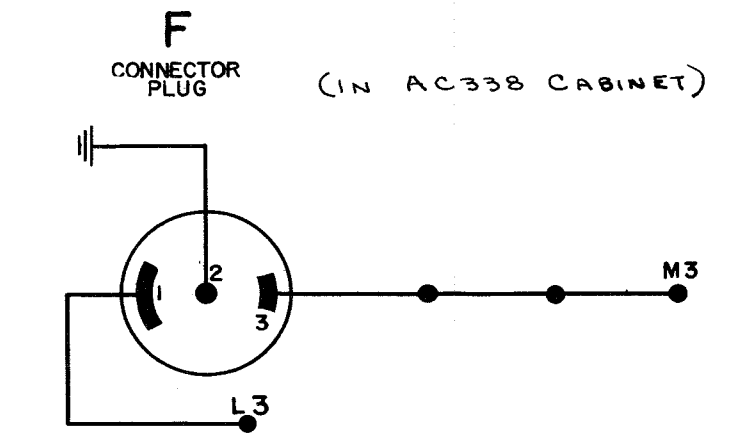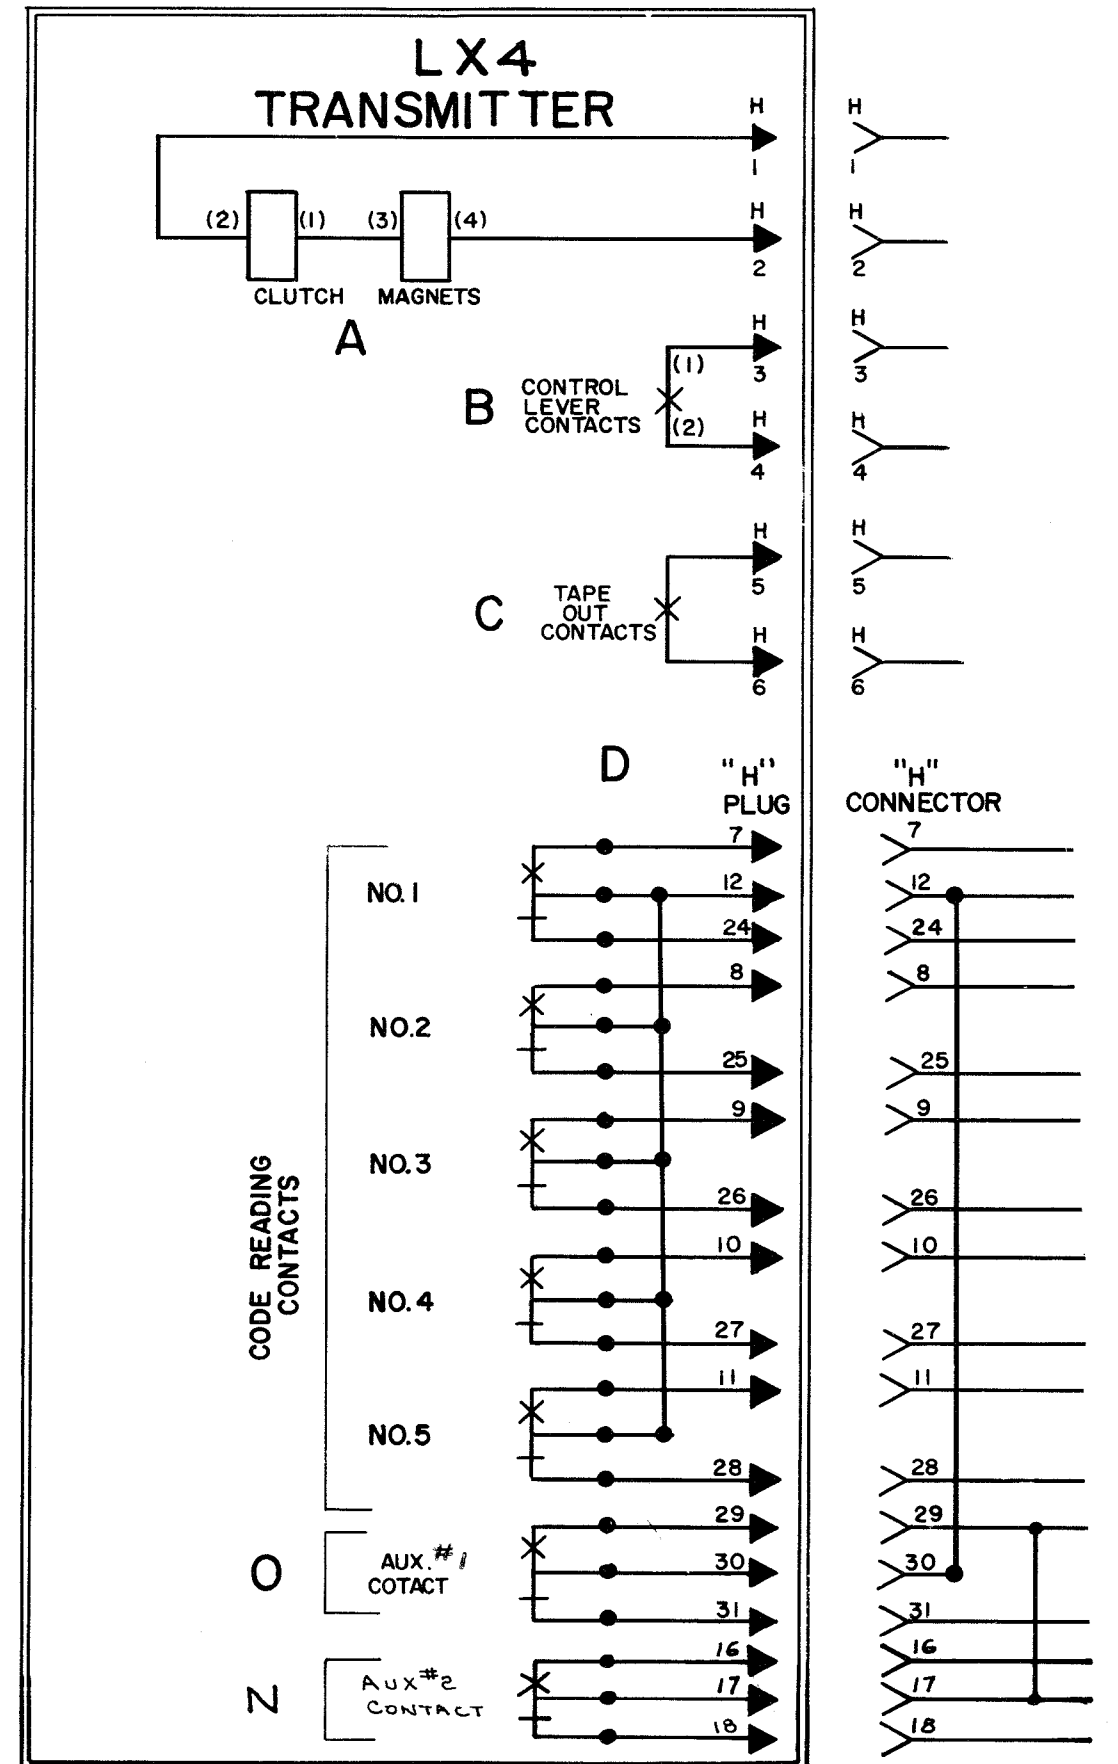

5879 WD		
REVISIONS		
ISSUE	DATE	AUTH. NO.

APPROVALS	
D AND R	E OF M
E-NUMBER	
PROD. NO. 5879 WD	

SCHEMATIC WIRING DIAGRAM OF LX4 TRANSMITTER AND LMU19 MOTOR UNIT

DATE: 8-17-62
PD. FILE NO. 4-95AAA
DRAWN G. J. M. CHKD J. L. L.
ENG'D P. H. B. APP'D
TELETYPE CORPORATION
5879 WD