


NOTICE: WHEN GOVERNMENT DRAWINGS, SPECIFICATIONS, OR OTHER DATA ARE USED FOR ANY PURPOSE OTHER THAN IN CONNECTION WITH A DEFINITELY RELATED GOVERNMENT PROCUREMENT OPERATION, THE UNITED STATES GOVERNMENT THEREBY INCURS NO RESPONSIBILITY FOR ANY OMISSION, WHATEVER, AND THE FACT THAT THE GOVERNMENT MAY HAVE FORMULATED, FURNISHED, OR IN ANY WAY SUPPLIED THE SAID DRAWINGS, SPECIFICATIONS, OR OTHER DATA IS NOT TO BE REGARDED BY INVENTION OR OTHERWISE AS IN ANY MANNER LICENSEING THE HOLDER OR ANY OTHER PERSON OR CORPORATION, OR CONVEYING ANY RIGHTS OR PRIVILEGES TO MANUFACTURE, USE, OR SELL ANY PATENTED INVENTION THAT MAY IN ANY WAY BE RELATED THERETO.

THIS DOCUMENT HAS BEEN PURCHASED BY THE GOVERNMENT AND MAY BE REPRODUCED AND USED IN CONNECTION WITH ANY GOVERNMENT PROCUREMENT OR MAINTENANCE OPERATION.

\* FOR INFORMATION ONLY. CONTRACTOR MAY AT HIS OPTION DEVIATE FROM THESE PROCESS DETAILS.

REVISIONS

SYM	DESCRIPTION	DATE	APPROVAL
<del>*SWE APPROVAL</del>			
<del>SYM PR10042-6</del>			
<del>B, CA.84821</del>			
A <sub>4</sub>	A <sub>1</sub> -REMOVED SILK SCREENING NOTATION A <sub>2</sub> -NOTE 1 WAS "SILK SCREENING TO BE ETC." A <sub>3</sub> -REMOVED NOTE 2 (REFERRED TO COLLINS SPEC, ETC.)	27 OCT 59	42428-PC-59 AL-51 PME
B <sub>1</sub>	B <sub>1</sub> -RELOCATE COMPONENT MARKING.	29 JUNE 60	42428-PC-59 PME

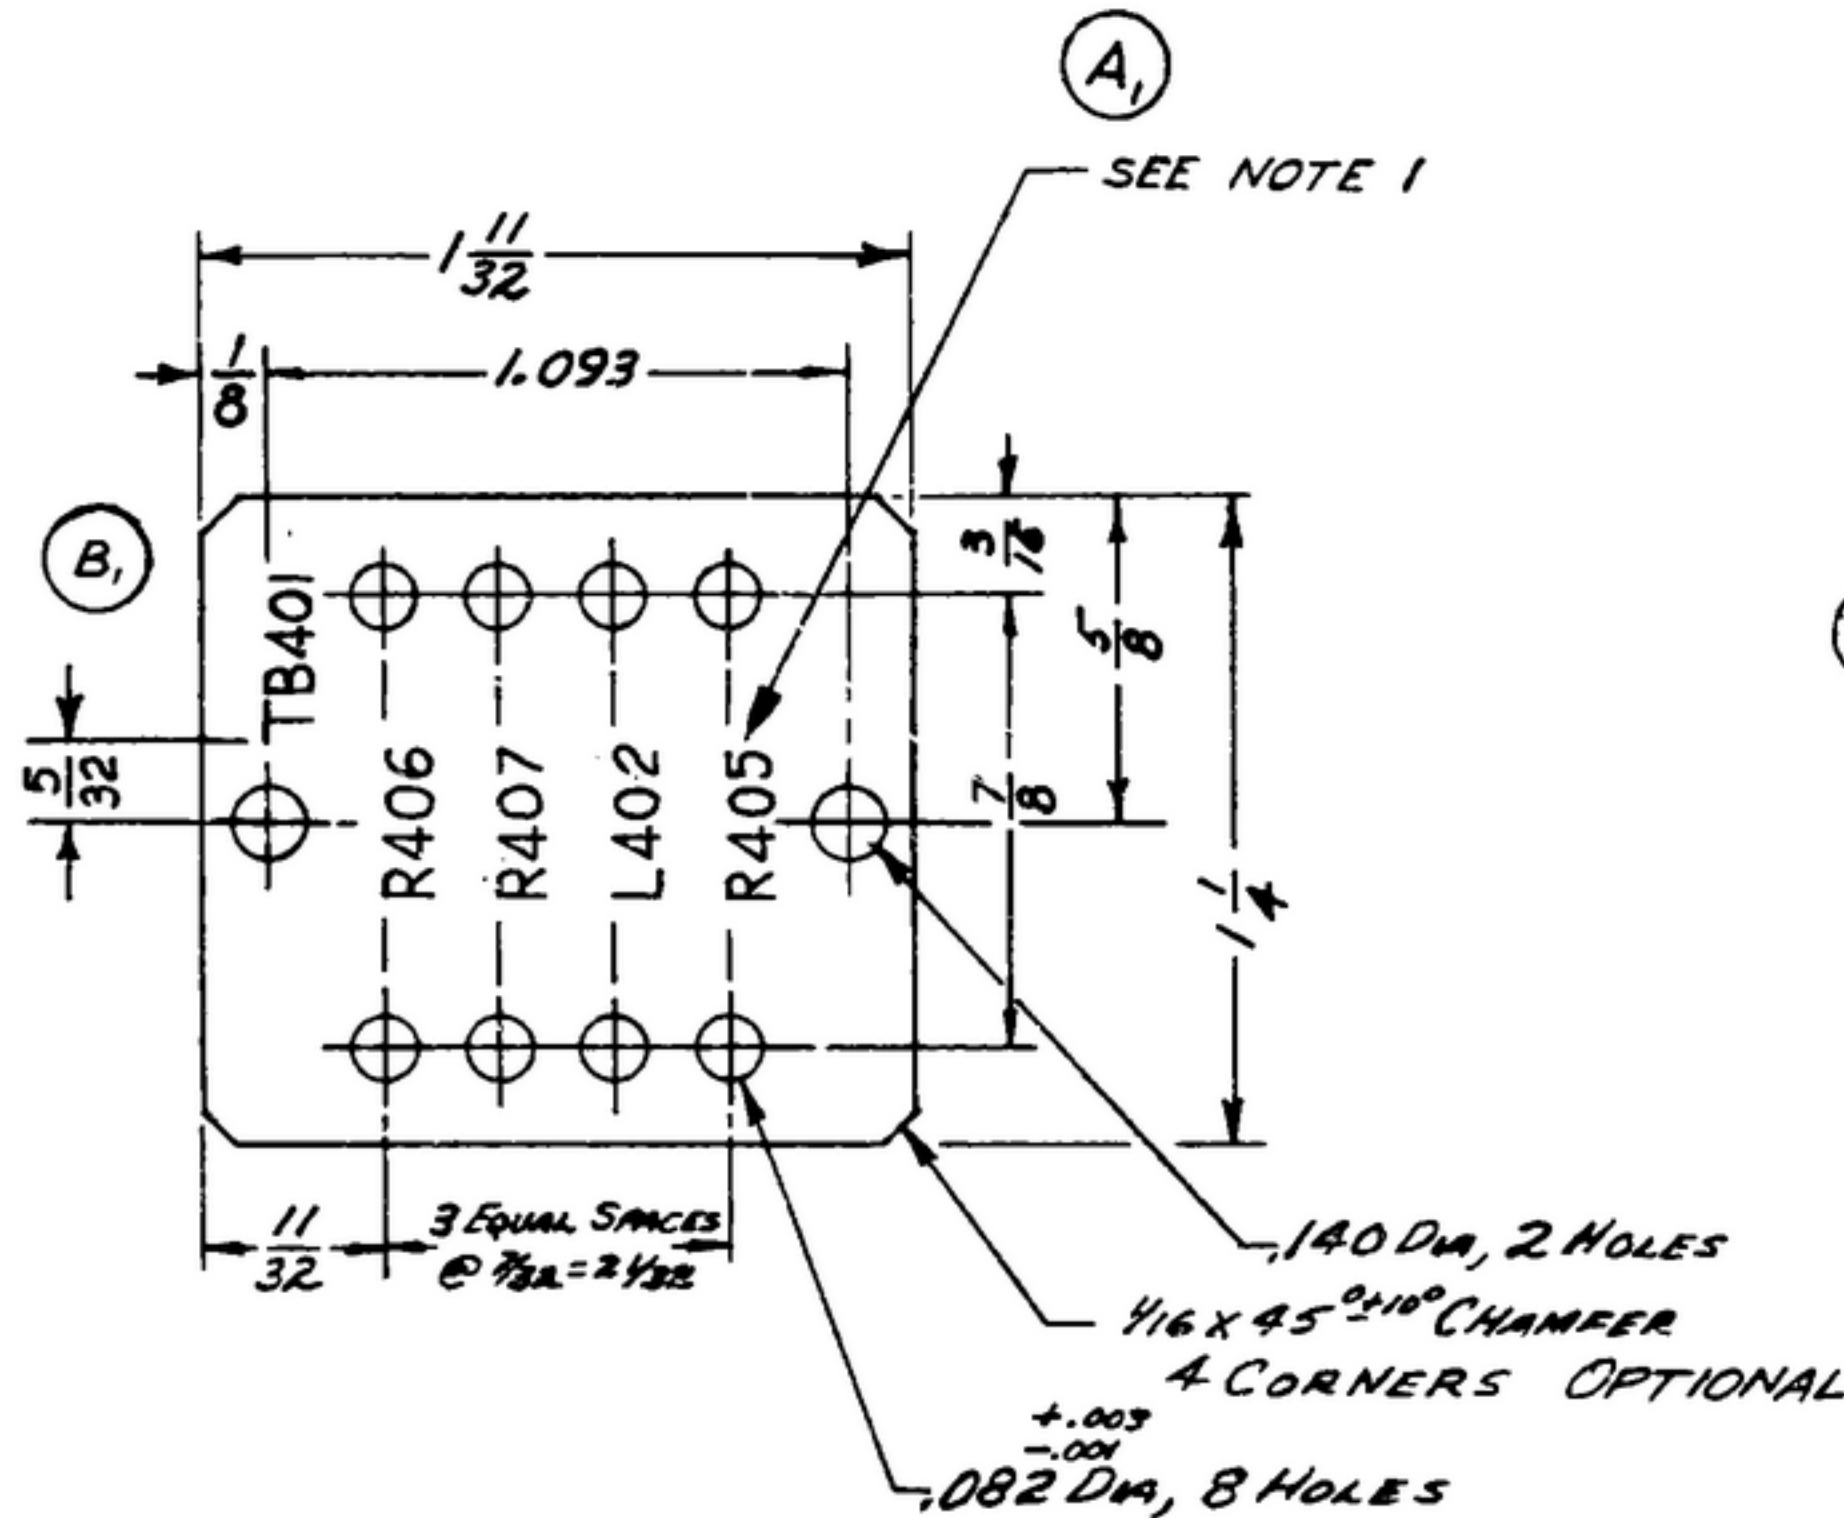

- NOTES:
- ALL CHARACTERS TO BE 3/32 HIGH GOTHIC TYPE PER SPEC MIL-M-13231, GROUP II COLOR TO BE WHITE COLOR CHIP #27786 PER FED. STD 595. MARKING TO BE CENTRALLY LOCATED ±1/32 UNLESS OTHERWISE SHOWN. COVER DESIGNATIONS WITH 1 COAT OF VARNISH PER SPEC MIL-V-173, TYPE II.

DLASTIC, TYPE PBE-P, PER SPEC MIL-P-3115, .094 THICK

ITEM	QTY	REF	PART NO	DESCRIPTION	MATL	NATL SPEC
1		REF	SM-B-248787	SILKSCREEN-TERM BOARD		

LIST OF MATERIAL

COLLINS PART NO. 558-0370-002

COLLINS NO.	QTY	NEXT ASSY	USED ON
558-0371-002	1	SM-B-249021	SC-DL-248775

DRAWN JENNETT  
 CHECKED Williams  
 APPROVED  
 UNLESS OTHERWISE SPECIFIED:  
 DECIMAL DIMENSIONS INCLUDING HOLE SIZES MAY VARY ±.005  
 FRACTIONAL DIMENSIONS INCLUDING HOLE SIZES MAY VARY ±1/64  
 MACHINED ANGLES MAY VARY ±1°  
 SHEARED ANGLES MAY VARY ±.25°  
 BROKEN ANGLES MAY VARY ±1°  
 ECCENTRICITY BETWEEN ANY DIAMETERS ON THE SAME CENTERLINE SHALL NOT EXCEED .010 TOTAL INDICATOR READING.  
 ALL DIMENSIONS ARE FINISH DIMENSIONS INCLUDING APPLIED FINISH AND ARE GIVEN IN INCHES.

COLLINS-RADIO CO.  
 6524A-RAPID, 1950-  
 1421A-PH  
 51-93  
 SIGNAL CORPS  
 REVIEWED PME  
 APPROVED HLY  
 PME  
 DATE 15 DEC 55 SCALE 2/1

BOARD-TERMINAL

DEPARTMENT OF THE ARMY  
 SIGNAL CORPS ENGINEERING  
 LABORATORIES  
 FORT MONMOUTH NEW JERSEY  
 SM-B-249020