

- NOTES:
- UNLESS OTHERWISE SHOWN, CAPACITANCE IN UUF, RESISTANCE IS IN OHMS, (1/2 WATT) INDUCTANCE IS IN UH.
 - FILTER FLJ001 CONTAINS A FILTER SECTION BETWEEN INDICATED TERMINALS. THE FOLLOWING TABLE CONTAINS THE SYMBOL NUMBERS AND VALUES OF THESE COMPONENTS.

FILTER FLJ001 COMPONENTS			
INPUT TERM. NO.	INPUT CAP. SYMBOL NO. & VALUE	OUTPUT CAP. SYMBOL NO. & VALUE	OUTPUT TERM. NO.
02	LI001-120UH	CI001-1000	01
04	CI004-1000	LI002-120UH	03
06	CI006-1000	LI003-120UH	05
08	CI008-1000	LI004-120UH	07
10	CI010-1000	LI005-120UH	09
12	CI012-1000	LI006-120UH	11
14	CI014-1000	SHUNT	13
16	CI016-1000	LI008-120UH	15
18	CI018-1000	LI009-120UH	17
20	OPEN CKT	OPEN CKT	19
22	CI022-1000	LI011-120UH	21
24	CI024-1000	LI02-120UH	23
26	CI026-1000	LI03-120UH	25
28	CI028-1000	LI04-120UH	27
30	CI030-1000	LI05-120UH	29
32	OPEN CKT	SHUNT	31
34	CI034-1000	LI07-9UH	33
36	CI036-1000	LI08-120UH	35
38	CI038-1000	LI09-120UH	37
40	OPEN CKT	SHUNT	39
42	OPEN CKT	SHUNT	41
44	CI044-1000	LI022-120UH	43
46	CI046-1000	LI023-120UH	45
48	CI048-1000	LI024-120UH	47
50	CI050-1000	LI025-120UH	49
52	CI052-1000	LI026-120UH	51
54	CI054-1000	LI027-120UH	53
56	CI056-1000	LI028-120UH	55
58	CI058-1000	LI029-120UH	57
60	CI060-300	LI030-120UH	59
62	CI062-1000	LI031-120UH	61
64	CI064-1000	LI032-120UH	63
66	CI066-1000	LI033-120UH	65
68	CI068-1000	LI034-120UH	67
70	CI070-1000	LI035-22UH	69

- FOR REMOTE OPERATION CONNECT TB1001-TB1003 TERMINAL FOR TERMINAL WITH NAVY TYPE 23500 RADIO PHONE UNIT TERMINAL BOARD.
- THE AUXILIARY RECEIVER ALTERNATE DISABLE. TB1003-15, PROVIDES A NO. (H-) ANTENNA CHANGE-OVER RELAY K1901 CONTACT TO GROUND WITH TB1001-1 JUMPED TO TB1001-2.

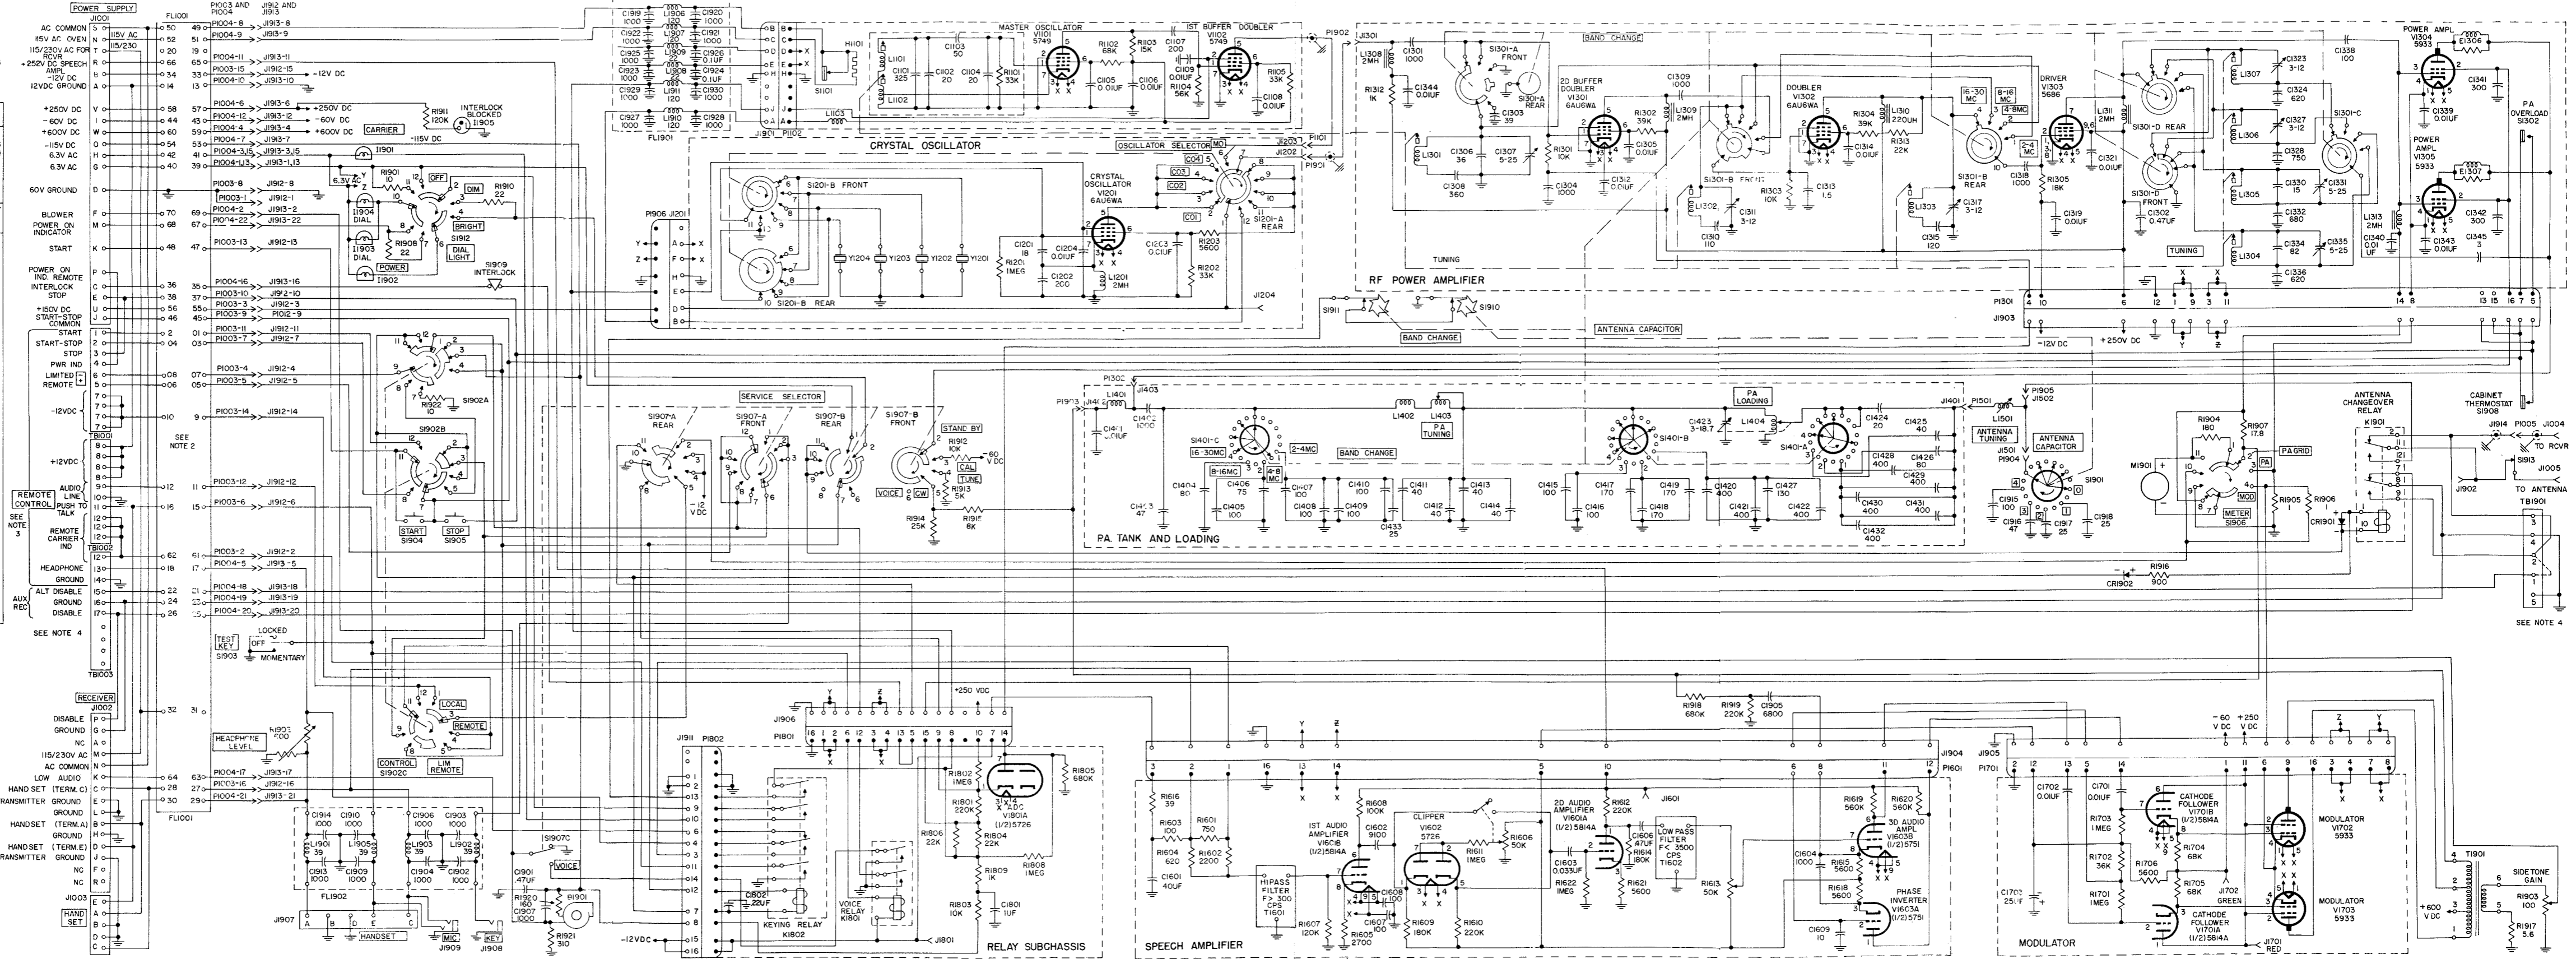


Figure 5-5. Radio Transmitter T-474(XN-1)/URC-8, Schematic Diagram