

BELL SYSTEM PRACTICES
Teletypewriter and Manual
Telegraph Station and PBX
Installation and Maintenance

SECTION P35.913
Issue A, 7-14-41
Long Lines Department
Dist. Class. 416.1AC

TELEGRAPH

INSTALLATION OF EXTERNALLY MOUNTED TAPE FEEDOUT

BUTTON (BLANKS)

NO. 14 TYPING REPERFORATORS

1. GENERAL

1.01 This section outlines the method of installing the arrangement for tape feedout on No. 14 typing reperforators described on Drawing S-8771-143. The arrangement provides for feeding out the tape by means of "Blank" combinations and consists of an externally mounted push button wired to short circuit the selector magnet.


1.02 The parts required to add this device are as follows:

- 1 No. 146 Edwards push button block with 6-foot cord for 1 button (walnut finish)
- 1 No. 2956 Bryant receptacle
- 1 No. 2958 Bryant plug
- 1 12F Connection block

Brown or black lamp cord as required

1.03 The arrangement shall be installed and wired as shown in Figure 1.

EXTERNALLY MOUNTED
TAPE FEEDOUT
BUTTON (BLANKS)

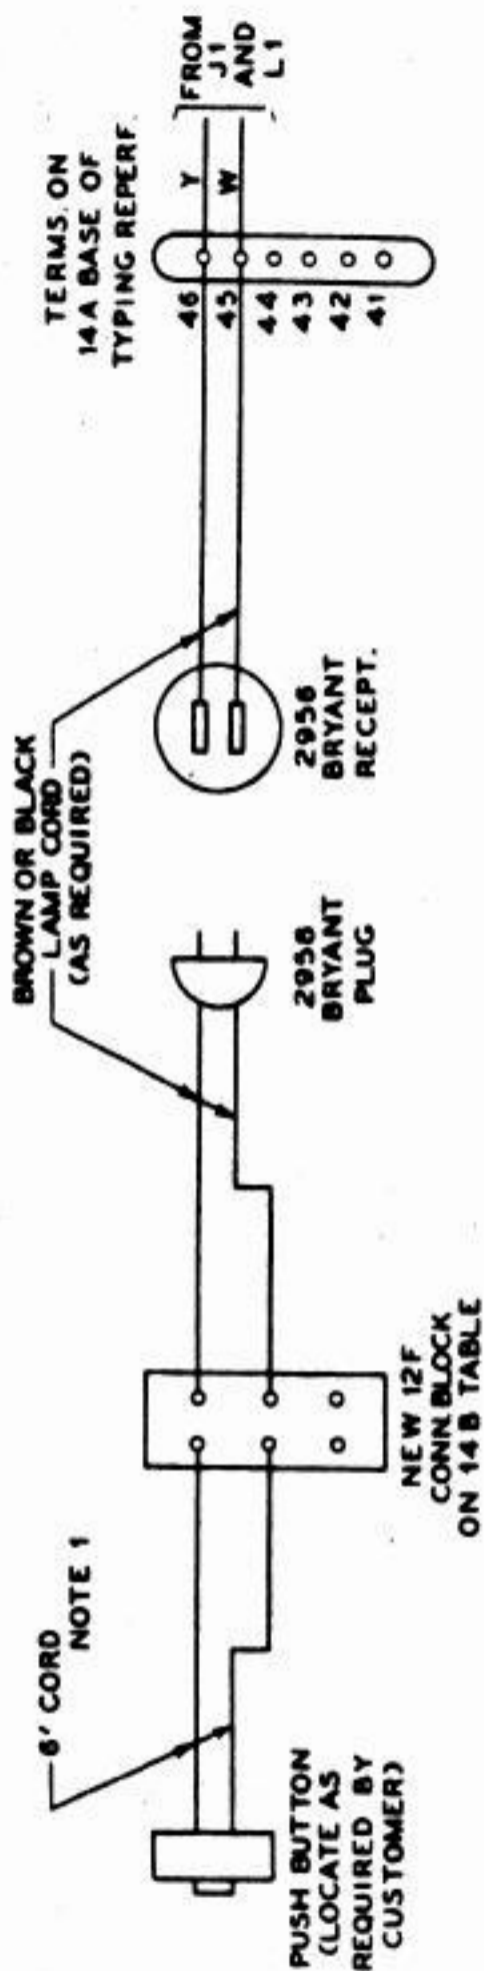

NOTE 1: IF PUSH BUTTON IS LOCATED
OTHER THAN ON TTY TABLE
LAMP CORD MAY BE REQUIRED
BETWEEN BUTTON AND CONN.
BLOCK.

FIG. 1