
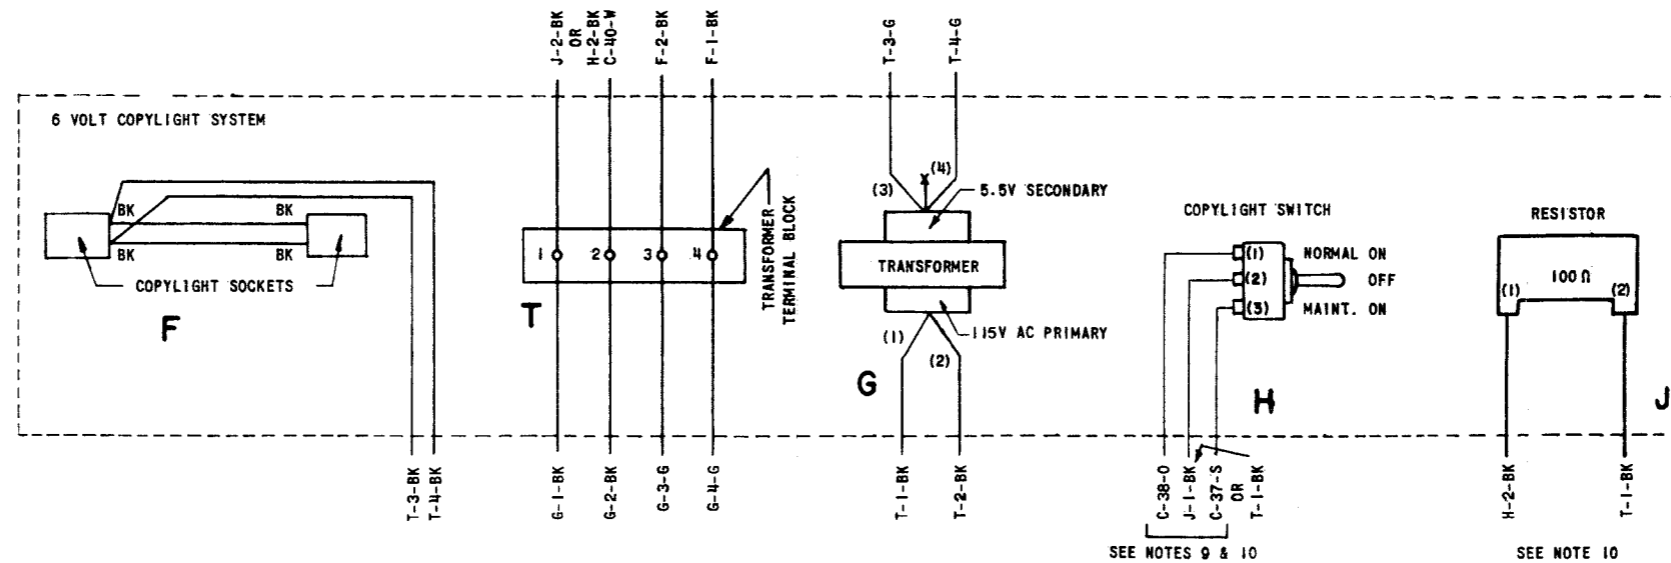


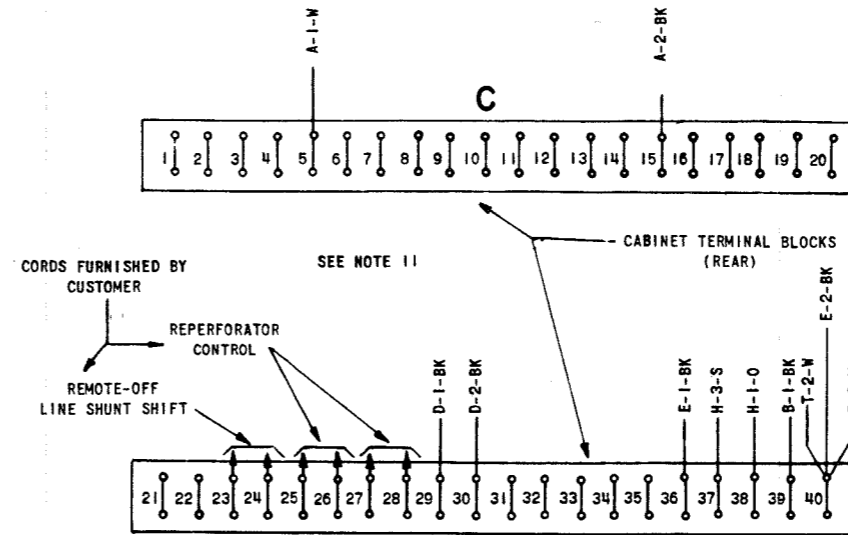


- NO. NOTES
1. WIRING LEGEND:
 2. COLOR CODE:
 BK - BLACK P - PURPLE
 BL - BLUE R - RED
 BR - BROWN S - SLATE
 G - GREEN W - WHITE
 O - ORANGE Y - YELLOW
 3. —X— DENOTES SPLICED AND TAPED WIRES.
 4. COMPONENTS SHOWN DOTTED ARE ACCESSORIES TO CABINET.
 5. USE POWER AND SIGNAL LINE INTERFERENCE SUPPRESSORS FOR INSTALLATIONS REQUIRING MINIMUM R.F. INTERFERENCE. FOR OTHER INSTALLATIONS, OMIT SUPPRESSORS AND CONNECT INPUTS DIRECTLY TO TERMINALS SHOWN.
 6. CABINET POWER CIRCUIT WIRING FOR 115V 60-60~ A.C. OPERATION ONLY. THE ASSOCIATED ELECTRICAL SERVICE UNIT MUST BE WIRED FOR A.C. OPERATION.
 7. NECESSARY STRAP CONNECTIONS AT THE CABINET TERMINAL BLOCKS ARE SHOWN ON THE ASSOCIATED ELECTRICAL SERVICE UNIT WIRING DIAGRAM. SEE THE LESU7 ACCESSORY GROUP B/M FOR THE DIAGRAM NUMBER.
 8. CONNECTOR VIEWED FROM SOLDER TERMINAL END.
 9. ROUTE MARGIN INDICATOR CABLE ALONG COPYLIGHT CABLE AND COPYLIGHT SWITCH CABLES. FASTEN INDICATOR AND SWITCH CABLES UNDER LOWER LEFT-HAND MOUNTING SCREW FOR THE RIGHT CABINET HINGE WITH CABLE CLAMPS, LOCK WASHERS, AND SCREWS SUPPLIED WITH THE COPYLIGHT KIT.
 10. AREA "J" IS NOT AVAILABLE WHEN USING THE 159357 MOD. KIT, THEREFORE, AREA "H" AND "T" ARE WIRED IN THE ALTERNATE METHOD.
 11. SEE APPROPRIATE ELECTRICAL SERVICE UNIT WIRING DIAGRAM. (AS INDICATED ON THE LESU7 ACCESSORY GROUP B/M). FOR SCHEMATIC, SEE ASSOCIATED LESU WD.

3236WD

REVISIONS

ISSUE	DATE	AUTH. NO.
A	11-26-56	28-7193
B	12-19-56	28-7260
C	7-11-57	28-7723
D 5	8-8-58	28-9690
E 6	10-14-58	28-9997
F 7	11-20-58	28-10197
8	3-11-59	28-10785
9	3-25-59	28-10913
10	9-22-61	71027

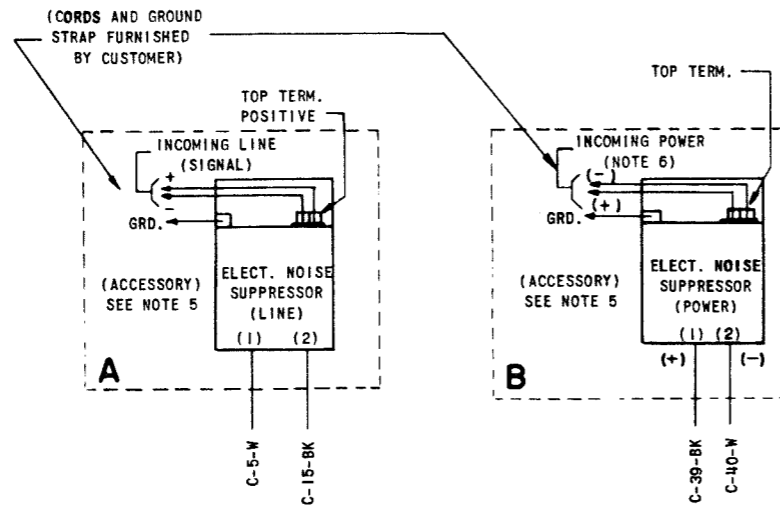

ACTUAL WIRING DIAGRAM FOR MODEL 28 PAGE PRINTER CABINETS LAC203, 204, 205, 217 ARRANGED FOR AC APPLICATION ACC GROUPS 137, 148, 149, 194, 195, 221, 222, 236, 237, 238, 239, 250

APPROVALS

D AND R	E OF M
---	---

E-NUMBER

PROD. NO. 3236WD

DATE 7-24-56

P.D. FILE NO. 2-30.65.156A

DRAWN J.T.D. CHKD.

ENGD. T.T.H. APPD.

TELETYPE CORPORATION

3236WD