


ASSOCIATED CABLES		
95054	CABLE	A.C.
95055	CABLE	D.C.
95056	CABLE	A.C.
95057	CABLE	D.C.
95058	CABLE	D.C.
95059	CABLE	A.C.
95060	CABLE	D.C.
95061	CABLE	D.C.
95062	CABLE	D.C.
105387	CABLE	D.C.
105392	CABLE	A.C.
105393	CABLE	A.C.

WIRE COLOR CODE	
CODE	SOLID COLOR OR TRACER IN WHITE WIRE
BK	BLACK
W	WHITE
R	RED
G	GREEN
O	ORANGE
BL	BLUE

ALL WIRES ARE BLACK UNLESS OTHERWISE DESIGNATED

RTTY ELECTRONICS
TELETYPE=Sales-Service-Parts
 PO Box 20101 El Sobrante, Ca.
 94820. (510)222-3102
 mr_rtty@pacbell.net

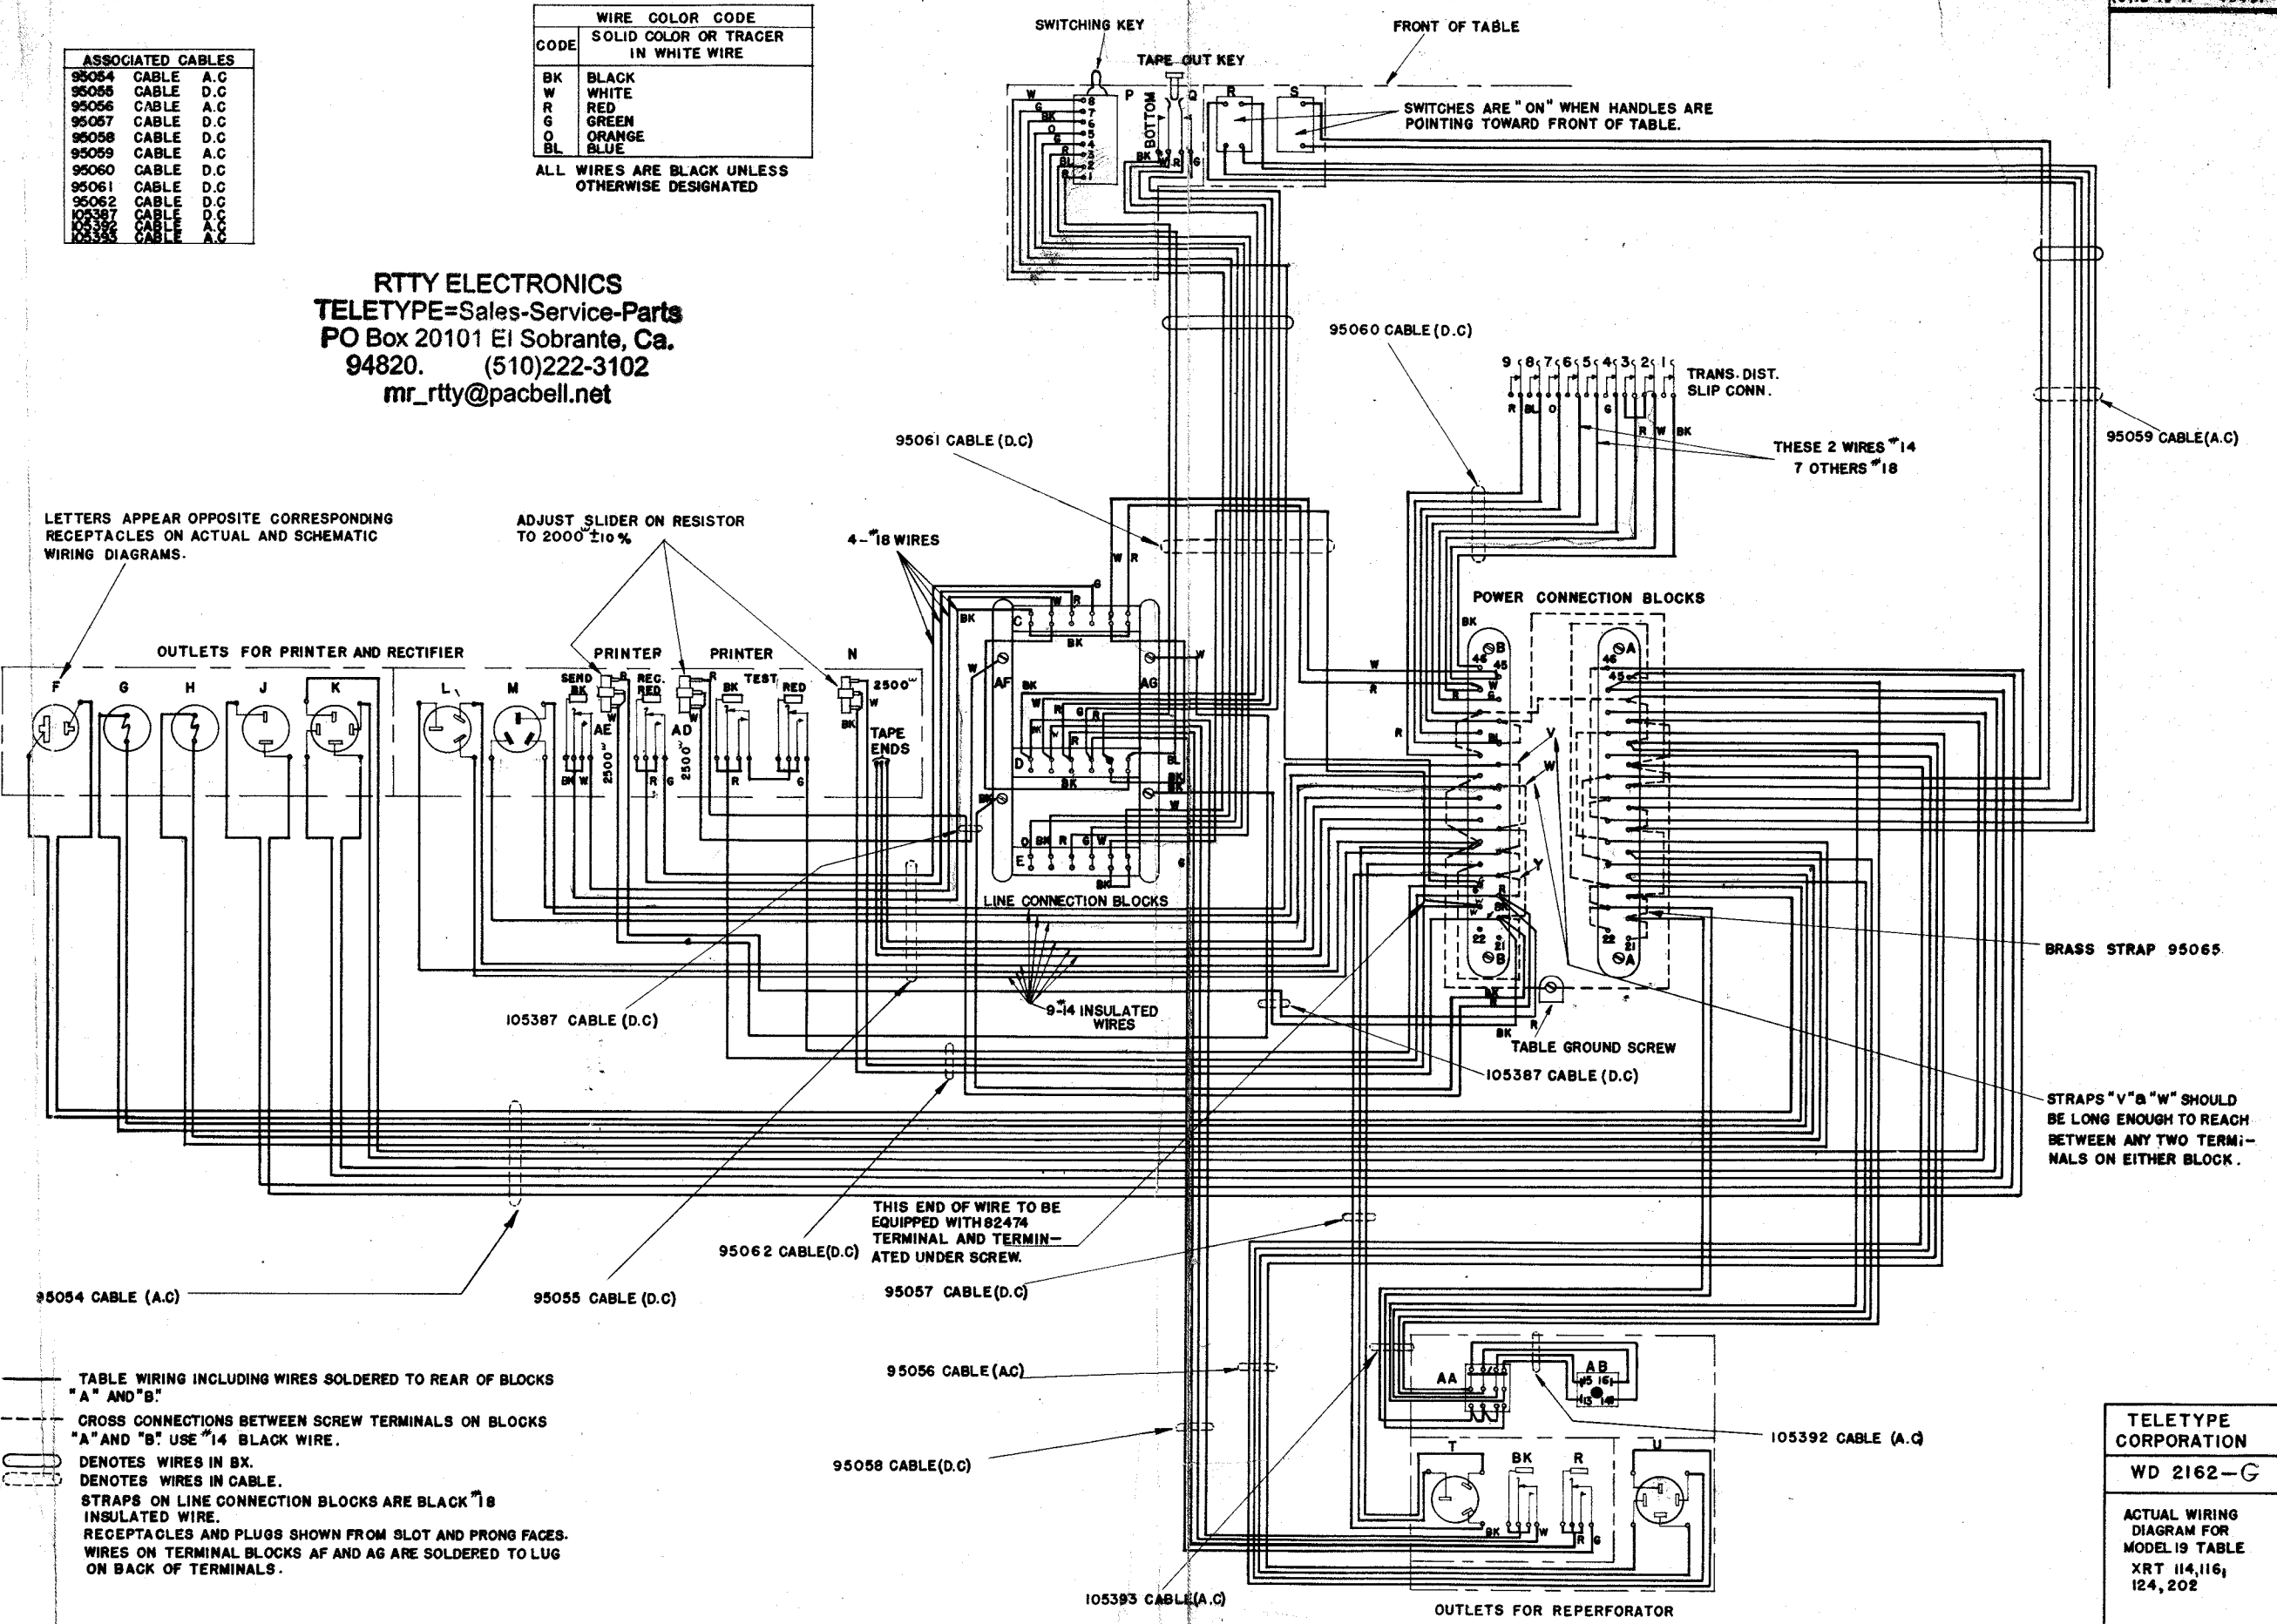

LETTERS APPEAR OPPOSITE CORRESPONDING RECEPTACLES ON ACTUAL AND SCHEMATIC WIRING DIAGRAMS.

ADJUST SLIDER ON RESISTOR TO 2000 ±10%

FRONT OF TABLE
 SWITCHES ARE "ON" WHEN HANDLES ARE POINTING TOWARD FRONT OF TABLE.

OUTLETS FOR PRINTER AND RECTIFIER

PRINTER

PRINTER

POWER CONNECTION BLOCKS

LINE CONNECTION BLOCKS

BRASS STRAP 95065

TABLE GROUND SCREW

STRAPS "V" & "W" SHOULD BE LONG ENOUGH TO REACH BETWEEN ANY TWO TERMINALS ON EITHER BLOCK.

THIS END OF WIRE TO BE EQUIPPED WITH 82474 TERMINAL AND TERMINATED UNDER SCREW.

95054 CABLE (A.C.)

95055 CABLE (D.C.)

95057 CABLE (D.C.)

95056 CABLE (A.C.)

95058 CABLE (D.C.)

105393 CABLE (A.C.)

105392 CABLE (A.C.)

OUTLETS FOR REPERFORATOR

- TABLE WIRING INCLUDING WIRES SOLDERED TO REAR OF BLOCKS "A" AND "B"
- - - CROSS CONNECTIONS BETWEEN SCREW TERMINALS ON BLOCKS "A" AND "B" USE #14 BLACK WIRE.
- ⊂ DENOTES WIRES IN BX.
- ⊃ DENOTES WIRES IN CABLE.
- STRAPS ON LINE CONNECTION BLOCKS ARE BLACK #18 INSULATED WIRE.
- RECEPTACLES AND PLUGS SHOWN FROM SLOT AND PRONG FACES.
- WIRES ON TERMINAL BLOCKS AF AND AG ARE SOLDERED TO LUG ON BACK OF TERMINALS.

TELETYPE CORPORATION
 WD 2162-G

ACTUAL WIRING DIAGRAM FOR MODEL 19 TABLE
 XRT 114,116, 124, 202

DRAWN L.M.G.
 TRACED W.M.B.
 CHECKED B.C.N.
 ENGRD. B.C.N.
 APPROVED